

CATS
(Cancer Genomic Test Standardized)
Format

Document for details

By Section of Genomic Data Management,
C-CAT

v1.32.01

2023/056/2114325~~2022/07/21~~

Contents

I. Introduction	194
I-1. Objectives	194
I-2. Terms	194
I-3. About the condition field	205
I-4. Format information	205
II. Matters specific to C-CAT	216
II-1. Sending format of files	216
II-2. Scope of inputs	216
II-3. Requests	216
II-4. Notes	226
III. metaData tag	237
III-1. schemaVersion key	237
III-2. referenceGenome tag	237
III-2-1. Tags within referenceGenome tag	237
III-2-2. Examples of referenceGenome tag	248
III-3. configOptions tag	248
III-3-1. Tags within configOptions tag	259
III-3-2. Example of configOptions tag	2912
III-4. comments tag	3014
III-4-1. Tags within comments tag	3014
III-4-2. Example of comments tag	3014
IV. testInfo tag	3216
IV-1. Tags within testInfo tag	3216
IV-2. Example of testInfo tag	3316
V. sequencingSamples tag	3418
V-1. Tags within sequencingSamples tag	3418
V-2. Example of sequencingSamples tag	3519
VI. variants tag	3821
VI-1. shortVariants tag	3821
VI-1-1. Tags within shortVariants tag	3821
VI-1-2. Example of shortVariants tag	4527
VI-2. copyNumberAlterations tag	5031
VI-2-1. Tags within copyNumberAlterations tag	5131
VI-2-2. Example of copyNumberAlterations tag	5434
VI-3. rearrangements tag	5535
VI-3-1. Tags within rearrangements tag	5535

VI-3-2. Example of rearrangements tag.....	6242
VII. otherBiomarkers tag.....	7049
VII-1. Tags within otherBiomarkers tag.....	7049
VII-2. Example of otherBiomarkers tag.....	7150
VIII. expressions tag.....	7352
VIII-1. Tags within expressions tag.....	7352
VIII-2. Example of expressions tag.....	7654
IX. armLevelChanges tag	7756
IX-1. Tags within armLevelChanges tag	7756
IX-2. Example of armLevelChanges tag	7857
X. nonHumanContents tag	8059
X-1. Tags within nonHumanContents tag	8059
X-2. Example of nonHumanContents tag	8160
XI. compositeBiomarkers tag	8261
XI-1. Tags within compositeBiomarkers tag	8261
XI-2. Example of compositeBiomarkers tag	8362
XII. Other notes.....	9763
XII-1. itemId	9763
XII-1-1. Example of itemId description	9763
XII-2. matePieceLocation.....	9864
XII-2-1. Example of matePieceLocation description.....	9864
XIII. For inquires.....	10066
I. Introduction	4
I-1. Objectives	4
I-2. Terms	4
I-3. About the condition field	5
I-4. Format information.....	5
H. Matters specific to C-CAT.....	6
H-1. Sending format of files.....	6
H-2. Scope of inputs	6
H-3. Requests.....	6
H-4. Notes.....	6
III. metaData tag	7
III-1. schemaVersion key	7
III-2. referenceGenome tag	7
III-2-1. Tags within referenceGenome tag	7
III-2-2. Examples of referenceGenome tag.....	8
III-3. configOptions tag.....	8

III-3-1. Tags within configOptions tag	9
III-3-2. Example of configOptions tag	1213
III-4. comments tag	14
III-4-1. Tags within comments tag	14
III-4-2. Example of comments tag	14
IV. testInfo tag	16
IV-1. Tags within testInfo tag	16
IV-2. Example of testInfo tag	16
V. variants tag	18
V-1. shortVariants tag	18
V-1-1. Tags within shortVariants tag	18
V-1-2. Example of shortVariants tag	2426
V-2. copyNumberAlterations tag	2830
V-2-1. Tags within copyNumberAlterations tag	2830
V-2-2. Example of copyNumberAlterations tag	3134
V-3. rearrangements tag	3235
V-3-1. Tags within rearrangements tag	3235
V-3-2. Example of rearrangements tag	3942
VI. otherBiomarkers tag	4649
VI-1. Tags within otherBiomarkers tag	4649
VI-2. Example of otherBiomarkers tag	4750
VII. expressions tag	4952
VII-1. Tags within expressions tag	4952
VII-2. Example of expressions tag	5154
VIII. armLevelChanges tag	5355
VIII-1. Tags within armLevelChanges tag	5355
VIII-2. Example of armLevelChanges tag	5456
IX. nonHumanContents tag	5658
IX-1. Tags within nonHumanContents tag	5658
IX-2. Example of nonHumanContents tag	5759
X. compositeBiomarkers tag	5860
X-1. Tags within compositeBiomarkers tag	5860
X-2. Example of compositeBiomarkers tag	5961
XI. sequencingSamples tag	6062
XI-1. Tags within sequencingSamples tag	6062
XI-2. Example of sequencingSamples tag	6163
XII. Other notes	6365
XII-1. itemId	6365

XH-1-1. Example of itemId description	6365
XH-2. matePieceLocation	6466
XH-2-1. Example of matePieceLocation description	6466
XIII. For inquires	6668
I. Introduction	4
I-1. Objectives	4
I-2. Terms	4
I-3. About the condition field	5
I-4. Format information	5
H. Matters specific to C-CAT	6
H-1. Sending format of files	6
H-2. Scope of inputs	6
H-3. Requests	6
H-4. Notes	6
III. metaData tag	7
III-1. schemaVersion key	7
III-2. referenceGenome tag	7
III-2-1. Tags within referenceGenome tag	7
III-2-2. Examples of referenceGenome tag	8
III-3. configOptions tag	8
III-3-1. Tags within configOptions tag	9
III-3-2. Example of configOptions tag	13
III-4. comments tag	14
III-4-1. Tags within comments tag	14
III-4-2. Example of comments tag	14
IV. testInfo tag	16
IV-1. Tags within testInfo tag	16
IV-2. Example of testInfo tag	17
V. variants tag	18
V-1. shortVariants tag	18
V-1-1. Tags within shortVariants tag	18
V-1-2. Example of shortVariants tag	25
V-2. copyNumberAlterations tag	28
V-2-1. Tags within copyNumberAlterations tag	28
V-2-2. Example of copyNumberAlterations tag	31
V-3. rearrangements tag	31
V-3-1. Tags within rearrangements tag	32
V-3-2. Example of rearrangements tag	38

VI. otherBiomarkers tag	44
VI-1. Tags within otherBiomarkers tag	44
VI-2. Example of otherBiomarkers tag	45
VII. expressions tag	47
VII-1. Tags within expressions tag	47
VII-2. Example of expressions tag	49
VIII. armLevelChanges tag	50
X-1. Tags within armLevelChanges tag	50
X-2. Example of armLevelChanges tag	51
IX. nonHumanContents tag	53
IX-1. Tags within nonHumanContents tag	53
IX-2. Example of nonHumanContents tag	54
X. compositeBiomarkers tag	55
X-1. Tags within compositeBiomarkers tag	55
X-2. Example of compositeBiomarkers tag	56
XI. sequencingSamples tag	57
XI-1. Tags within sequencingSamples tag	57
XI-2. Example of sequencingSamples tag	58
XII. Other notes	59
XII-1. itemId	59
XII-1-1. Example of itemId description	59
XII-2. matePieceLocation	60
XII-2-1. Example of matePieceLocation description	60
XIII. For inquires	62
I. Introduction	415
I-1. Objectives	415
I-2. Terms	415
I-3. About the condition field	516
I-4. Format information	516
H. Matters specific to C-CAT	617
H-1. Sending format of files	617
H-2. Scope of inputs	617
H-3. Requests	617
H-4. Notes	617
III. metaData tag	718
III-1. schemaVersion key	718
III-2. referenceGenome tag	718
III-2-1. Tags within referenceGenome tag	718

III-2-2. Examples of referenceGenome tag	819
III-3. configOptions tag	819
III-3-1. Tags within configOptions tag	920
III-3-2. Example of configOptions tag	1324
III-4. comments tag	1425
III-4-1. Tags within comments tag	1425
III-4-2. Example of comments tag	1425
IV. testInfo tag	1627
IV-1. Tags within testInfo tag	1627
IV-2. Example of testInfo tag	1728
V. variants tag	1829
V-1. shortVariants tag	1829
V-1-1. Tags within shortVariants tag	1829
V-1-2. Example of shortVariants tag	2536
V-2. copyNumberAlterations tag	2841
V-2-1. Tags within copyNumberAlterations tag	2841
V-2-2. Example of copyNumberAlterations tag	3145
V-3. rearrangements tag	3145
V-3-1. Tags within rearrangements tag	3246
V-3-2. Example of rearrangements tag	3853
VI. otherBiomarkers tag	4459
VI-1. Tags within otherBiomarkers tag	4459
VI-2. Example of otherBiomarkers tag	4560
VII. compositeBiomarkers tag	4762
VII-1. Tags within compositeBiomarkers tag	4762
VII-2. Example of compositeBiomarkers tag	4863
VIII. sequencingSamples tag	4964
VIII-1. Tags within sequencingSamples tag	4964
VIII-2. Example of sequencingSamples tag	5065
IX. expressions tag	5166
IX-1. Tags within expressions tag	5166
IX-2. Example of expressions tag	536952
X. armLevelChanges tag	5470
X-1. Tags within armLevelChanges tag	5470
X-2. Example of armLevelChanges tag	5571
XI. nonHumanContents tag	5773
XI-1. Tags within nonHumanContents tag	5773
XI-2. Example of nonHumanContents tag	5874

XII. Other notes.....	5975
XII-1. itemId.....	5975
XII-1-1. Example of itemId description.....	5975
XII-2. matePieceLocation.....	6076
XII-2-1. Example of matePieceLocation description.....	6076
XIII. For inquires.....	6278
I. Introduction.....	4
I-1. Objectives.....	4
I-2. Terms.....	4
I-3. About the condition field.....	5
I-4. Format information.....	5
H. Matters specific to C-CAT.....	6
H-1. Sending format of files.....	6
H-2. Scope of inputs.....	6
H-3. Requests.....	6
H-4. Notes.....	6
III. metaData tag.....	7
III-1. schemaVersion key.....	7
III-2. referenceGenome tag.....	7
III-2-1. Tags within referenceGenome tag.....	7
III-2-2. Examples of referenceGenome tag.....	8
III-3. configOptions tag.....	8
III-3-1. Tags within configOptions tag.....	9
III-3-2. Example of configOptions tag.....	13
III-4. comments tag.....	14
III-4-1. Tags within comments tag.....	14
III-4-2. Example of comments tag.....	14
IV. testInfo tag.....	16
IV-1. Tags within testInfo tag.....	16
IV-2. Example of testInfo tag.....	17
V. variants tag.....	18
V-1. shortVariants tag.....	18
V-1-1. Tags within shortVariants tag.....	18
V-1-2. Example of shortVariants tag.....	25
V-2. copyNumberAlterations tag.....	28
V-2-1. Tags within copyNumberAlterations tag.....	28
V-2-2. Example of copyNumberAlterations tag.....	31
V-3. rearrangements tag.....	31

V-3-1.—Tags within rearrangements tag.....	32
V-3-2.—Example of rearrangements tag.....	38
VI. otherBiomarkers tag	44
VI-1. Tags within otherBiomarkers tag	44
VI-2. Example of otherBiomarkers tag	45
VII. compositeBiomarkers tag.....	47
VII-1. Tags within compositeBiomarkers tag.....	47
VII-2. Example of compositeBiomarkers tag.....	48
VIII. sequencingSamples tag	49
VIII-1. Tags within sequencingSamples tag	49
VIII-2. Example of sequencingSamples tag	50
IX. expressions tag.....	51
IX-1. Tags within expressions tag.....	51
IX-2. Example of expressions tag.....	52
X. armLevelChanges tag.....	54
X-1. Tags within armLevelChanges tag.....	54
X-2. Example of armLevelChanges tag.....	55
XI. nonHumanContents tag	57
XI-1. Tags within nonHumanContents tag	57
XI-2. Example of nonHumanContents tag	58
XII. Other notes.....	59
XII-1. itemId	59
XII-1-1. Example of itemId description	59
XII-2. matePieceLocation	60
XII-2-1. Example of matePieceLocation description.....	60
XIII. For inquires	62
I. Introduction	4
I-1. Objectives	4
I-2. Terms	4
I-3. About the condition field	5
I-4. Format information.....	5
H. Matters specific to C-CAT.....	6
H-1. Sending format of files.....	6
H-2. Scope of inputs	6
H-3. Requests.....	6
H-4. Notes.....	6
III. metaData tag	7
III-1. schemaVersion key	7

III-2. referenceGenome tag	7
III-2-1. Tags within referenceGenome tag	7
III-2-2. Examples of referenceGenome tag	8
III-3. configOptions tag	8
III-3-1. Tags within configOptions tag	9
III-3-2. Example of configOptions tag	13
III-4. comments tag	14
III-4-1. Tags within comments tag	14
III-4-2. Example of comments tag	14
IV. testInfo tag	16
IV-1. Tags within testInfo tag	16
IV-2. Example of testInfo tag	17
V. variants tag	18
V-1. shortVariants tag	18
V-1-1. Tags within shortVariants tag	18
V-1-2. Example of shortVariants tag	25
V-2. copyNumberAlterations tag	28
V-2-1. Tags within copyNumberAlterations tag	28
V-2-2. Example of copyNumberAlterations tag	31
V-3. rearrangements tag	31
V-3-1. Tags within rearrangements tag	32
V-3-2. Example of rearrangements tag	38
VI. otherBiomarkers tag	44
VI-1. Tags within otherBiomarkers tag	44
VI-2. Example of otherBiomarkers tag	45
VII. compositeBiomarkers tag	47
VII-1. Tags within compositeBiomarkers tag	47
VII-2. Example of compositeBiomarkers tag	48
VIII. sequencingSamples tag	49
VIII-1. Tags within sequencingSamples tag	49
VIII-2. Example of sequencingSamples tag	50
IX. expressions tag	51
IX-1. Tags within expressions tag	51
IX-2. Example of expressions tag	52
X. armLevelChanges tag	54
X-1. Tags within armLevelChanges tag	54
X-2. Example of armLevelChanges tag	55
XI. nonHumanContents tag	57

XI-1. Tags within nonHumanContents tag	57
XI-2. Example of nonHumanContents tag	58
XII. Other notes.....	59
XII-1. itemId	59
XII-1-1. Example of itemId description	59
XII-2. matePieceLocation	60
XII-2-1. Example of matePieceLocation description	60
XIII. For inquires	62
I. Introduction	4
I-1. Objectives	4
I-2. Terms	4
I-3. About the condition field	5
I-4. Format information	5
H. Matters specific to C-CAT.....	6
H-1. Sending format of files.....	6
H-2. Scope of inputs	6
H-3. Requests.....	6
H-4. Notes.....	6
III. metaData tag	7
III-1. schemaVersion key	7
III-2. referenceGenome tag	7
III-2-1. Tags within referenceGenome tag	7
III-2-2. Examples of referenceGenome tag	8
III-3. configOptions tag	8
III-3-1. Tags within configOptions tag.....	9
III-3-2. Example of configOptions tag	13
III-4. comments tag	14
III-4-1. Tags within comments tag	14
III-4-2. Example of comments tag	14
IV. testInfo tag.....	16
IV-1. Tags within testInfo tag.....	16
IV-2. Example of testInfo tag.....	17
V. variants tag.....	18
V-1. shortVariants tag.....	18
V-1-1. Tags within shortVariants tag	18
V-1-2. Example of shortVariants tag	24
V-2. copyNumberAlterations tag.....	28
V-2-1. Tags within copyNumberAlterations tag	28

V-2-2.—Example of copyNumberAlterations tag	31
V-3. rearrangements tag	32
V-3-1.—Tags within rearrangements tag.....	32
V-3-2.—Example of rearrangements tag.....	38
VI. otherBiomarkers tag	44
VI-1. Tags within otherBiomarkers tag	44
VI-2. Example of otherBiomarkers tag	45
VII. compositeBiomarkers tag.....	47
VII-1. Tags within compositeBiomarkers tag	47
VII-2. Example of compositeBiomarkers tag.....	48
VIII. sequencingSamples tag	49
VIII-1. Tags within sequencingSamples tag	49
VIII-2. Example of sequencingSamples tag	50
IX. expressions tag.....	51
IX-1. Tags within expressions tag.....	51
IX-2. Example of expressions tag.....	52
X. armLevelChanges tag.....	54
X-1. Tags within armLevelChanges tag.....	54
X-2. Example of armLevelChanges tag.....	55
XI. nonHumanContents tag	57
XI-1. Tags within nonHumanContents tag	57
XI-2. Example of nonHumanContents tag	58
XII. Other notes.....	59
XII-1. itemId	59
XII-1-1. Example of itemId description	59
XII-2. matePieceLocation.....	60
XII-2-1. Example of matePieceLocation description	60
XIII. For inquires	62
I. Introduction	4
I-1. Objectives	4
I-2. Terms	4
I-3. About the condition field	5
I-4. Format information.....	5
H. Matters specific to C-CAT.....	6
H-1. Sending format of files.....	6
H-2. Scope of inputs	6
H-3. Requests.....	6
H-4. Notes.....	6

III. metaData tag	7
III-1. schemaVersion key	7
III-2. referenceGenome tag	7
III-2-1. Tags within referenceGenome tag	7
III-2-2. Examples of referenceGenome tag	8
III-3. configOptions tag	8
III-3-1. Tags within configOptions tag	9
III-3-2. Example of configOptions tag	13
III-4. comments tag	14
III-4-1. Tags within comments tag	14
III-4-2. Example of comments tag	14
IV. testInfo tag	16
IV-1. Tags within testInfo tag	16
IV-2. Example of testInfo tag	17
V. variants tag	18
V-1. shortVariants tag	18
V-1-1. Tags within shortVariants tag	18
V-1-2. Example of shortVariants tag	24
V-2. copyNumberAlterations tag	28
V-2-1. Tags within copyNumberAlterations tag	28
V-2-2. Example of copyNumberAlterations tag	31
V-3. rearrangements tag	32
V-3-1. Tags within rearrangements tag	32
V-3-2. Example of rearrangements tag	38
VI. otherBiomarkers tag	44
VI-1. Tags within otherBiomarkers tag	44
VI-2. Example of otherBiomarkers tag	45
VII. compositeBiomarkers tag	47
VII-1. Tags within compositeBiomarkers tag	47
VII-2. Example of compositeBiomarkers tag	48
VIII. sequencingSamples tag	49
VIII-1. Tags within sequencingSamples tag	49
VIII-2. Example of sequencingSamples tag	50
IX. expressions tag	51
IX-1. Tags within expressions tag	51
IX-2. Example of expressions tag	52
X. armLevelChanges tag	54
X-1. Tags within armLevelChanges tag	54

X-2. Example of armLevelChanges tag.....	55
XI. nonHumanContents tag	57
XI-1. Tags within nonHumanContents tag	57
XI-2. Example of nonHumanContents tag	58
XII. Other notes.....	59
XII-1. itemId	59
XII-1-1. Example of itemId description	59
XII-2. matePieceLocation	60
XII-2-1. Example of matePieceLocation description	60
XIII. For inquires	62
I. Introduction	74
I-1. Objectives	74
I-2. Terms	74
I-3. About the condition field	85
I-4. Format information	85
H. Matters specific to C-CAT.....	96
H-1. Sending format of files.....	96
H-2. Scope of inputs	96
H-3. Requests.....	96
H-4. Notes.....	96
HH. metaData tag	107
HH-1. schemaVersion key	107
HH-2. referenceGenome tag	107
HH-2-1. Tags within referenceGenome tag.....	107
HH-2-2. Examples of referenceGenome tag	118
HH-3. configOptions tag.....	118
HH-3-1. Tags within configOptions tag.....	129
HH-3-2. Example of configOptions tag.....	1613
HH-4. comments tag	1714
HH-4-1. Tags within comments tag	1714
HH-4-2. Example of comments tag	1714
IV. testInfo tag.....	1916
IV-1. Tags within testInfo tag.....	1916
IV-2. Example of testInfo tag.....	2017
V. variants tag.....	2118
V-1. shortVariants tag.....	2118
V-1-1. Tags within shortVariants tag	2118
V-1-2. Example of shortVariants tag	2723

V-2. copyNumberAlterations tag.....	3027
V-2-1.—Tags within copyNumberAlterations tag.....	3127
V-2-2.—Example of copyNumberAlterations tag.....	3330
V-3. rearrangements tag.....	3430
V-3-1.—Tags within rearrangements tag.....	3431
V-3-2.—Example of rearrangements tag.....	4137
VI. otherBiomarkers tag.....	4743
VI-1. Tags within otherBiomarkers tag.....	4743
VI-2. Example of otherBiomarkers tag.....	4844
VII. compositeBiomarkers tag.....	5046
VII-1. Tags within compositeBiomarkers tag.....	5046
VII-2. Example of compositeBiomarkers tag.....	5147
VIII. sequencingSamples tag.....	5248
VIII-1. Tags within sequencingSamples tag.....	5248
VIII-2. Example of sequencingSamples tag.....	5349
IX. expressions tag.....	5450
IX-1. Tags within expressions tag.....	5450
IX-2. Example of expressions tag.....	5551
X. armLevelChanges tag.....	5753
X-1. Tags within armLevelChanges tag.....	5753
X-2. Example of armLevelChanges tag.....	5854
XI. nonHumanContents tag.....	6056
XI-1. Tags within nonHumanContents tag.....	6056
XI-2. Example of nonHumanContents tag.....	6156
XII. Other notes.....	6258
XII-1. itemId.....	6258
XII-1-1. Example of itemId description.....	6258
XII-2. matePieceLocation.....	6359
XII-2-1.—Example of matePieceLocation description.....	6359
XIII. For inquires.....	6561
I. Introduction.....	4
I-1. Objectives.....	4
I-2. Terms.....	4
I-3. About the condition field.....	5
I-4. Format information.....	5
H. Matters specific to C-CAT.....	6
H-1. Sending format of files.....	6
H-2. Scope of inputs.....	6

H-3. Requests.....	6
H-4. Notes.....	6
HH. metaData tag	7
HH-1. schemaVersion key	7
HH-2. referenceGenome tag	7
HH-2-1. Tags within referenceGenome tag	7
HH-2-2. Examples of referenceGenome tag	8
HH-3. configOptions tag	8
HH-3-1. Tags within configOptions tag	9
HH-3-2. Example of configOptions tag	13
HH-4. comments tag	14
HH-4-1. Tags within comments tag	14
HH-4-2. Example of comments tag	14
IV. testInfo tag.....	16
IV-1. Tags within testInfo tag.....	16
IV-2. Example of testInfo tag.....	17
V. variants tag.....	18
V-1. shortVariants tag.....	18
V-1-1. Tags within shortVariants tag	18
V-1-2. Example of shortVariants tag	23
V-2. copyNumberAlterations tag.....	27
V-2-1. Tags within copyNumberAlterations tag	27
V-2-2. Example of copyNumberAlterations tag	30
V-3. rearrangements tag	30
V-3-1. Tags within rearrangements tag.....	31
V-3-2. Example of rearrangements tag.....	37
VI. otherBiomarkers tag	42
VI-1. Tags within otherBiomarkers tag	42
VI-2. Example of otherBiomarkers tag	43
VH. compositeBiomarkers tag	45
VH-1. Tags within compositeBiomarkers tag	45
VH-2. Example of compositeBiomarkers tag	46
VHH. sequencingSamples tag	47
VHH-1. Tags within sequencingSamples tag	47
VHH-2. Example of sequencingSamples tag	48
IX. expressions tag.....	49
IX-1. Tags within expressions tag.....	49
IX-2. Example of expressions tag.....	50

X. armLevelChanges tag	52
X-1. Tags within armLevelChanges tag	52
X-2. Example of armLevelChanges tag	53
XI. nonHumanContents tag	55
XI-1. Tags within nonHumanContents tag	55
XI-2. Example of nonHumanContents tag	55
XII. Other notes	57
XII-1. itemId	57
XII-1-1. Example of itemId description	57
XII-2. matePieceLocation	58
XII-2-1. Example of matePieceLocation description	58
XIII. For inquires	60
I. — Introduction	4
I-1. — Objectives	4
I-2. — Terms	4
I-3. — About the condition field	5
I-4. — Format information	5
H. — Matters specific to C-CAT	6
H-1. — Sending format of files	6
H-2. — Scope of inputs	6
H-3. — Requests	6
H-4. — Notes	6
III. — metaData tag	7
III-1. schemaVersion key	7
III-2. referenceGenome tag	7
III-2-1. Tags within referenceGenome tag	7
III-2-2. Examples of referenceGenome tag	7
III-3. configOptions tag	8
III-3-1. Tags within configOptions tag	8
III-3-2. Example of configOptions tag	12
III-4. comments tag	13
III-4-1. Tags within comments tag	13
III-4-2. Example of comments tag	13
IV. — testInfo tag	15
IV-1. Tags within testInfo tag	15
IV-2. Example of testInfo tag	16
V. — variants tag	17
V-1. — shortVariants tag	17

V-1-1. Tags within shortVariants tag	17
V-1-2. Example of shortVariants tag	22
V-2. copyNumberAlterations tag	25
V-2-1. Tags within copyNumberAlterations tag	25
V-2-2. Example of copyNumberAlterations tag	27
V-3. rearrangements tag	28
V-3-1. Tags within rearrangements tag	28
V-3-2. Example of rearrangements tag	34
VI. otherBiomarkers tag	39
VI-1. Tags within otherBiomarkers tag	39
VI-2. Example of otherBiomarkers tag	40
VII. compositeBiomarkers tag	42
VII-1. Tags within compositeBiomarkers tag	42
VII-2. Example of compositeBiomarkers tag	42
VIII. sequencingSamples tag	44
VIII-1. Tags within sequencingSamples tag	44
VIII-2. Example of sequencingSamples tag	45
IX. expressions tag	46
IX-1. Tags within expressions tag	46
IX-2. Example of expressions tag	47
X. nonHumanContents tag	49
X-1. Tags within nonHumanContents tag	49
X-2. Example of nonHumanContents tag	49
XI. Other notes	51
XI-1. itemId	51
XI-1-1. Example of itemId description	51
XI-2. matePieceLocation	51
XI-2-1. Example of matePieceLocation description	52
XII. For inquires	54

I. Introduction

I-1. Objectives

Currently, testing companies use different formats for data on gene alterations in comprehensive genomic profiling tests of cancer. The difference makes it difficult for a third party to annotate gene alterations with candidate drugs and clinical trials using the same software under a simple framework. To efficiently promote uniformity and homogeneity in the interpretation of cancer genomic test results, it is necessary to define a standardized format to present gene alteration data in cancer comprehensive genome profiling tests.

This document describes the CATS (cancer genomic test standardized) format, a standardized format for presenting gene alteration data in cancer comprehensive genomic profiling tests. The data schema of the CATS format is defined by the JSON definition file "schema.json", the specifications of which are explained in this document.

This format is used as follows: A laboratory that performs cancer comprehensive genome profiling tests sends gene alteration data in the CATS format to a testing annotation organization such as C-CAT. The organization annotates gene alteration data in the CATS format with candidate drugs and clinical trials, taking into account the clinical data of patients. This format only applies to gene alteration data, not clinical data, because clinical data are stored in electronic medical records in hospitals and are unlikely to be accessible to testing companies.

I-2. Terms

- *Testing annotation organization*: An organization that receives gene alteration data in cancer comprehensive genome profiling tests from testing companies and clinical data from hospitals and uses the cancer knowledge base to annotate each gene alteration with candidate drugs and clinical trials. For example, C-CAT.
- *Testing annotation document*: A document that associates individual gene alterations in a cancer comprehensive genomic profiling test with candidate drugs and clinical trials for each patient. An example is the C-CAT Findings document. In contrast to a testing annotation document, a testing report document is a report of test results issued by a testing company.
- *Cancer knowledge base*: A database that associates gene alterations in cancer with candidate drugs and clinical trials. Examples include C-CAT CKDB (cancer knowledge database) and OncoKB (Chakravarty et al, 2017, JCO Precision Oncology).

I-3. About the condition field

- Required: Required field when the JSON parent tag exists.
- Optional: Recommended field that may be associated with drug and clinical trial information in testing annotation documents or that increases the accuracy of testing annotation documents according to testing reports issued by testing companies.

I-4. Format information

- Character code: UTF8
- Type: JSON
- Extension: json

II. Matters specific to C-CAT

II-1. Sending format of files

Gene alteration data in cancer comprehensive genomic profiling tests should be sent to C-CAT from the testing company in CATS (cancer genomic test standardized) format.

II-2. Scope of inputs

Quality-assured data on gene alterations (~~shortVariant, copyNumberAlteration, rearrangement, and otherBiomarker~~) are in the scope of inputs in CATS format. Please do not input alterations that are determined as to be false positives. Please do not input alterations suspicious as false positives. You can choose whether or not to show alterations and their associated knowledge base annotations in C-CAT Findings by the tag ("reported" and "grade") described below later. You can choose whether or not to show alterations in C-CAT Findings by the tag ("reported") described below.

Note: "Gene alterations" here indicate high-level objects that represent gene alterations, such as shortVariants explained below, and do not indicate each of the detailed items at lower levels.

With these above attentionsse caveats in mind, pPlease be sure to input data on gene alterations in the testing company's test result report or equivalent report.that are approved by the concerned authorities and be sure to output them in C-CAT Findings. Please be sure to output data on gene alterations that are approved by the concerned authorities in C-CAT Findings.

II-3. Requests

- It is recommended to provide inputs for as many optional fields as possible. As a result, more information on drugs or clinical trials may be added to C-CAT Findings, and C-CAT Findings based on laboratory testing reports will be more accurate. Additionally, more information linked to these fields may be added in future versions, even if such information does not appear in the current version of C-CAT Findings. C-CAT may separately contact the testing company for inputs in optional fields as necessary.
- Please try your best to input quality-assured data on all gene alterations (including those with the tag of "reported": false, as explained below) in CATS format. Otherwise, in case of any changes in the format or specifications of laboratory testing reports, C-

CAT may send inquiries to ~~the laboratory~~ the testing company and the production of C-CAT Findings may be delayed.

II-4. Notes

Detailed precautions specific to C-CAT are indicated by “*” in the Description below.

III. metaData tag

This tag is used to define the metadata.

It contains 4 keys: schemaVersion, referenceGenome, configOptions, and comments.

Key	Condition	Data type	Description
metaData	required	object	Aggregation tag for metadata

III-1. schemaVersion key

Key	Condition	Data type	Description
schemaVersion	required	string regex: ^[0-9\\.\.]+\$	Schema version of this format

III-2. referenceGenome tag

Key	Condition	Data type	Description
referenceGenome	required	object	For information on a reference genome sequence

III-2-1. Tags within referenceGenome tag

Key	Condition	Data type	Description
name	optional	string regex: ^.+	Name of a reference genome sequence used in your test.
grcRelease	required	string regex: ^GRC.+	GRC (Genome Reference Consortium) release ID of a reference genome sequence.
descriptions	optional	array (length: 0-N, string regex: ^.+)	Description of the reference genome sequence in the name tag. See the contents tag within the comments tag for usable languages and new lines.

III-2-2. Examples of referenceGenome tag

(Example1. for NCBI)

```
"referenceGenome": {
  "name": "GRCh38.p13",
  "grcRelease": "GRCh38.p13",
  "descriptions": [
    "Homo sapiens (human) genome assembly GRCh37 (hg19) from the Genome Reference Consortium."
  ]
}
```

(Example2. for UCSC)

```
"referenceGenome": {
  "name": "hg38Patch11",
  "grcRelease": "GRCh38.p11",
  "descriptions": [
    "GRCh38 Genome Reference Consortium Human Reference 38 (GCA_000001405.22)"
  ]
}
```

(Example3. for GDC)

```
"referenceGenome": {
  "name": "GRCh38.d1.vd1",
  "grcRelease": "GRCh38",
  "descriptions": [
    "Homo sapiens (human) genome assembly GRCh38 (hg38) from GDC, GRCh38.d1.vd1"
  ]
}
```

III-3. configOptions tag

This tag controls matching to cancer knowledge bases, such as C-CAT CKDB, ~~and determines whether or not to hide values measured in your test from testing annotation documents such as the C-CAT Findings document.~~

Key	Condition	Data type	Description
configOptions	optional	object	Aggregation tag that controls matching to cancer knowledge bases and listing in testing annotation documents.

III-3-1. Tags within configOptions tag

Key	Condition	Data type	Description
typeLabelsInterpretedAsKbAmplification	optional	array (length: 1-4, string) [choice]	<p>The testing company's labels for gene alterations, which are interpreted as "<u>amplification</u>" (copy number amplification) in cancer knowledge bases. Choose from the following options (must not be duplicated in an array).</p> <ul style="list-style-type: none"> • "copyNumberAlterationType: amplification" • "copyNumberAlterationType: gain" • "copyNumberAlterationType: duplication" • "rearrangementType: duplication" <p>(Default: "copyNumberAlterationType: amplification", "copyNumberAlterationType: gain", "copyNumberAlterationType: duplication")</p>
typeLabelsInterpretedAsKbLoss	optional	array (length: 1-5, string) [choice]	<p>The testing company's labels for gene alterations, which are interpreted as "<u>loss</u>" (copy number loss) in cancer knowledge bases. Choose from the following options (must not be duplicated in an array).</p> <ul style="list-style-type: none"> • "copyNumberAlterationType: loss" • "copyNumberAlterationType: deletion" • "copyNumberAlterationType: homozygous deletion" • "rearrangementType: deletion" • "rearrangementType: exon skipping" <p>(Default: "copyNumberAlterationType: loss", "copyNumberAlterationType: deletion", "copyNumberAlterationType: homozygous deletion")</p>

typeLabelsInterpretedAsKbGeneFusion	optional	array (length: 1-4, string) [choice]	<p>The testing company's labels for gene alterations, which are interpreted as "<u>geneFusion</u>" (gene fusion) in cancer knowledge bases.</p> <p>Choose from the following options (must not be duplicated in an array).</p> <ul style="list-style-type: none"> • "rearrangementType: gene fusion" • "rearrangementType: gene fusion and frameshift variant" • "rearrangementType: bidirectional gene fusion" • "rearrangementType: other" <p>(Default: "rearrangementType: gene fusion", "rearrangementType: gene fusion and frameshift variant", "rearrangementType: bidirectional gene fusion")</p>
typeLabelsInterpretedAsKbInversion	optional	array (length: 1-3, string) [choice]	<p>The testing company's labels for gene alterations, which are interpreted as "<u>inversion</u>" (gene inversion) in cancer knowledge bases.</p> <p>Choose from the following options (must not be duplicated in an array).</p> <ul style="list-style-type: none"> • "rearrangementType: inversion" • "rearrangementType: truncation" • "rearrangementType: other" <p>(Default: "rearrangementType: inversion")</p>
typeLabelsInterpretedAsKbDeletion	optional	array (length: 1-8, string) [choice]	<p>The testing company's labels for gene alterations, which are interpreted as "<u>deletion</u>" (gene deletion) in cancer knowledge bases.</p> <p>Choose from the following options (must not be duplicated in an array).</p> <ul style="list-style-type: none"> • "rearrangementType: deletion" • "rearrangementType: truncation" • "rearrangementType: splice variant" • "rearrangementType: exon skipping" • "rearrangementType: other" • "copyNumberAlterationType: deletion" • "copyNumberAlterationType: homozygous deletion" • "copyNumberAlterationType: loss" <p>(Default: "rearrangementType: deletion")</p>

typeLabelsInterpretedAsKbDuplication	optional	array (length: 1-6, string) [choice]	<p>The testing company's labels for gene alterations, which are interpreted as "<u>duplication</u>" (gene duplication) in cancer knowledge bases.</p> <p>Choose from the following options (must not be duplicated in an array).</p> <ul style="list-style-type: none"> • "rearrangementType: duplication" • "rearrangementType: tandem duplication" • "rearrangementType: other" • "copyNumberAlterationType: duplication" • "copyNumberAlterationType: amplification" • "copyNumberAlterationType: gain" <p>(Default: "rearrangementType: duplication", "rearrangementType: tandem duplication")</p>
typeLabelsInterpretedAsKbTruncation	optional	array (length: 1-7, string) [choice]	<p>The testing company's labels for gene alterations, which are interpreted as "<u>truncation</u>" (gene truncation) in cancer knowledge bases.</p> <p>Choose from the following options (must not be duplicated in an array).</p> <ul style="list-style-type: none"> • "rearrangementType: truncation" • "rearrangementType: deletion" • "rearrangementType: inversion" • "rearrangementType: other" • "copyNumberAlterationType: loss" • "copyNumberAlterationType: deletion" • "copyNumberAlterationType: homozygous deletion" <p>(Default: "rearrangementType: truncation")</p>
typeLabelsInterpretedAsKbExonSkipping	optional	array (length: 1-4, string) [choice]	<p>The testing company's labels for gene alterations, which are interpreted as "<u>exon skipping</u>" (exon skipping) in cancer knowledge bases.</p> <p>Choose from the following options (must not be duplicated in an array).</p> <ul style="list-style-type: none"> • "rearrangementType: exon skipping" • "rearrangementType: splice variant" • "rearrangementType: deletion" • "rearrangementType: other" <p>(Default: "rearrangementType: exon skipping")</p>

<u>typeLabelsInterpretedAsTranslocation</u>	<u>optional</u>	<u>array</u> (length: 1-2, string) <u>[choice]</u>	<p>The testing company's labels for gene alterations, which are interpreted as "<u>translocation</u>" (translocation) in cancer knowledge bases.</p> <p>Choose from the following options (must not be duplicated in an array).</p> <ul style="list-style-type: none"> • "<u>rearrangementType: translocation</u>" • "<u>rearrangementType: other</u>" <p>(Default: "<u>rearrangementType: translocation</u>")</p>
typeLabelsInterpretedAsKbRearrangement	optional	array (length: 1-187, string) [choice]	<p>The testing company's labels for gene alterations, which are interpreted as "<u>rearrangement</u>" (gene rearrangement) in cancer knowledge bases.</p> <p>Choose from the following options (must not be duplicated in an array).</p> <ul style="list-style-type: none"> • "rearrangementType: gene fusion" • "rearrangementType: gene fusion and frameshift variant" • "rearrangementType: bidirectional gene fusion" • "rearrangementType: duplication" • "rearrangementType: tandem duplication" • "rearrangementType: deletion" • "rearrangementType: inversion" • "rearrangementType: truncation" • "rearrangementType: splice variant" • "rearrangementType: exon skipping" • "<u>rearrangementType: translocation</u>" • "rearrangementType: other" • "copyNumberAlterationType: amplification" • "copyNumberAlterationType: gain" • "copyNumberAlterationType: duplication" • "copyNumberAlterationType: loss" • "copyNumberAlterationType: deletion" • "copyNumberAlterationType: homozygous deletion" <p>(Default: "rearrangementType: other")</p>
hideAlleleFrequency	optional	boolean	<p>Variant allele frequency values will not be shown in testing annotation documents when this is true.</p> <p>* Please input false or do not include the key for information approved by the authorities.</p> <p>(Default: false)</p>

hideCnaValue	optional	boolean	Same for the values of copy number alterations.
hideMsiValue	optional	boolean	Same for the values of micro-satellite instability (MSI).
hideTmbValue	optional	boolean	Same for the values of tumor mutation burden (TMB).
hideLohValue	optional	boolean	Same for the values of Loss of Heterozygosity (LOH).

III-3-2. Example of configOptions tag

(Example)

```
"configOptions": {
"hideTmbValue": true,
"hideLohValue": true,
  "typeLabelsInterpretedAsKbAmplification": [
    "copyNumberAlterationType: amplification",
    "copyNumberAlterationType: gain",
    "copyNumberAlterationType: duplication"
  ],
  "typeLabelsInterpretedAsKbLoss": [
    "copyNumberAlterationType: loss",
    "copyNumberAlterationType: deletion",
    "rearrangementType: deletion"
  ],
  "typeLabelsInterpretedAsKbGeneFusion": [
    "rearrangementType: gene fusion",
    "rearrangementType: gene fusion and frameshift variant",
    "rearrangementType: bidirectional gene fusion"
  ],
  "typeLabelsInterpretedAsKbInversion": [
    "rearrangementType: inversion"
  ],
  "typeLabelsInterpretedAsKbDeletion": [
    "rearrangementType: deletion"
  ],
  "typeLabelsInterpretedAsKbDuplicationDeletion": [
    "rearrangementType: duplication",
    "rearrangementType: tandem duplication"
  ],
  "typeLabelsInterpretedAsKbTruncation": [
    "rearrangementType: truncation"
  ]
}
```

III-4. comments tag

You can comment on gene alterations (variants), biomarkers (otherBiomarkers), and information on sequencing samples (sequencingSamples). This tag contains the itemIds and contents tags.

Key	Condition	Data type	Description
comments	optional	array (length: 0-N, object)	Aggregation tag for comment information. Each object in the array must be unique.

III-4-1. Tags within comments tag

Key	Condition	Data type	Description
itemIds	required	array (length: 0-N, string regex: ^.{+}\$)	The itemIds (multiple unique itemIds possible) to indicate alterations (variants), biomarkers (otherBiomarkers), and information on sequencing samples (sequencingSamples). Possible to comment on a test overall if you set the length of this key to be zero. * The content will not be shown in C-CAT Findings, if itemId is specified.
contents	required	array (length: 1-N, string regex: ^.{+}\$)	The content of the comment for itemId. The description can be in English or Japanese. Please use array elements if you make new lines, because we ignore line feed codes in this tag. * The total number of characters for each element is within 4,000 characters including the line feed code.

III-4-2. Example of comments tag

(Example)
<pre>"comments": [{ "itemIds": [], "contents": ["Amplification of the FGFR1 gene is observed in 5 to 20% of squamous cell carcinomas, and it has been reported that FGFR1 is sensitive to FGFR inhibitors in vitro.",] }]</pre>

"FGFR2 and FGFR3 gene activating mutations and FGFR3 gene fusions have been reported one after another, and their frequency is low at around 3%, but therapeutic effects with FGFR inhibitors are expected."

Note: If you want to make new lines in testing annotation documents, sentences or phrases should be separated as elements of an array.

```
]
},
{
  "itemIds": [
    "variant-1"
```

Note: The itemId of the mutation should be included to comment on a specific mutation.

```
],
  "contents": [
    "TSC1 functions independently of TSC2 and mTORC1."
  ]
},
{
```

```
  "itemIds": [
    "variant-1",
    "variant-5"
```

Note: You can comment on multiple mutations altogether by listing multiple itemIds.

```
],
  "contents": [
    "Although CD4 T cell percentage in Tsc1-/- mice was not strongly affected by Bim deficiency in vivo, TCR-mediated apoptosis of Tsc1-/- Bcl2l11-/- double knockout CD4 T cells was less pronounced compared with that of Tsc1-/- cells. (Kai Yang et al.)"
  ]
}
]
```

IV. testInfo tag

This tag is used to provide test information.

Key	Condition	Data type	Description
testInfo	required	object	Aggregation tag for test information

IV-1. Tags within testInfo tag

Key	Condition	Data type	Description
testId	required	string regex: ^..+\$	Any ID used by the testing company
testType	required	string [choice]	The combination of specimens used in the test. <ul style="list-style-type: none"> • "tumor-only": test using tumor samples only • "tumor and matched-normal": test using tumor and matched normal samples • "tumor-only (cell-free)": test using cell-free tumor samples only • "tumor (cell-free) and matched-normal": test using cell-free tumor samples and normal samples
targetRegion Version	optional	string regex: ^..+\$	Target area version defined in the bed file
testForReferenceOnly	optional	boolean	Whether or not the test result is used as a reference value because the sample does not meet the quality conditions set by the testing company. (Default: false)
softwareName	optional	string regex: ^..+\$	Name of gene analysis software
softwareVersion	optional	string regex: ^..+\$	Version of gene analysis software
panelName	required	string regex: ^..+\$	Name of your genomic profiling (gene panel) test. * Please inform C-CAT beforehand if you want to use a genomic test NOT approved to use under National Health Insurance.
panelVersion	required	string regex: ^..+\$	Version of your test

IV-2. Example of testInfo tag

(Example)

```
"testInfo": {  
  "testId": "12345678901231900001",  
  "testType": "tumor and matched-normal",  
  "targetRegionVersion": "target region A",  
  "testForReferenceOnly": false,  
  "softwareName": "variant caller A",  
  "softwareVersion": "ver.1.2",  
  "panelName": "Multi-gene Panel A",  
  "panelVersion": "ver.1.03-00"  
}
```

V. sequencingSamples tag

This tag is used to provide the information on sequencing samples results in the NGS run.

<u>Key</u>	<u>Condition</u>	<u>Data type</u>	<u>Description</u>
<u>sequencingSamples</u>	<u>required</u>	<u>array (length: 1-N, object)</u>	<u>Aggregation tag for information on sequencing samples results. Each object in the array must be unique.</u>

The maximum length of this array is 4, since the tumorOrNormal tag and the nucleicAcid tag can each take two values "tumor" or "normal" and "DNA" or "RNA", respectively.

V-1. Tags within sequencingSamples tag

<u>Key</u>	<u>Condition</u>	<u>Data type</u>	<u>Description</u>
<u>itemId</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>The ID of the sample.</u> <u>It must be a unique string of characters within a single case.</u>
<u>tumorOrNormal</u>	<u>required</u>	<u>string</u> <u>[choice]</u>	<u>Whether the sequencing samples results are of tumor specimen or normal specimen.</u> <ul style="list-style-type: none"><u>• "tumor"</u><u>• "normal"</u>
<u>nucleicAcid</u>	<u>required</u>	<u>string</u> <u>[choice]</u>	<u>Whether the sequencing samples results are derived from DNA or RNA samples.</u> <ul style="list-style-type: none"><u>• "DNA": DNA sample</u><u>• "RNA": RNA sample</u>
<u>resultQuality</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>The quality of the sequencing samples results determined by the testing company.</u> <ul style="list-style-type: none"><u>• "pass": Pass</u><u>• "reference": Reference purpose only</u><u>• "fail": Fail</u>
<u>specimenType</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>The name of the specimen typewritten in the testing company's report.</u>
<u>sampleMetrics</u>	<u>optional</u>	<u>array</u> <u>(length: 1-N, object)</u>	<u>Measured value information.</u> <u>Each object in the array must be unique.</u>

<u>value</u>	<u>required</u>	<u>number</u>	<u>Measured value</u> e.g.) 91.52
<u>unit</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>Unit for the measured value.</u> <u>Units may vary depending on test types.</u> e.g.) % <u>If the inspection value is a scalar, you can input null.</u>
<u>type</u>	<u>required</u>	<u>string</u> <u>[choice]</u>	<u>Type of measured value. Select one from:</u> <ul style="list-style-type: none"> • <u>"totalReadCount": The total number of reads including unmapped reads.</u> • <u>"totalMappedReadCount": The total number of mapped reads.</u> • <u>"duplicateReadsPercentage": Percentage of duplicate reads in total reads.</u> • <u>"mappedReadsPercentage": Percentage of mapped reads in total reads</u> • <u>"meanReadDepth": Mean read depth.</u> • <u>"medianReadDepth": Median read depth.</u> <u>* Inform C-CAT for other options.</u>
<u>suspectedSample States</u>	<u>optional</u>	<u>array</u> (length: 0-N, string) <u>[choice]</u>	<u>The suspicious state of a DNA or RNA sample, such as "contaminated" (must not be duplicated in an array).</u> <ul style="list-style-type: none"> • <u>"contaminated": Possibility of contamination</u> • <u>"deaminated": Possibility of notable cytosine deamination in FFPE DNA</u> • <u>"fragmented": Possibility of notable (FFPE DNA) fragmentation.</u> • <u>"degraded": Possibility of notable (RNA) degradation</u> • <u>"²low tumor purity²": Low tumor purity.</u> • <u>"²low depth²": Low read depth.</u>

V-2. Example of sequencingSamples tag

(Example)
"sequencingSamples": [
{
 "itemId": "sequence-1-tumor-dna",
 "tumorOrNormal": "tumor",

```

    "nucleicAcid": "DNA",
    "specimenType": "FFPE",
    "sampleMetrics": [
      {
        "value": 91.52,
        "unit": "%",
        "type": "duplicateReadsPercentage"
      },
      {
        "value": 87.31,
        "unit": "%",
        "type": "mappedReadsPercentage"
      },
      {
        "value": 247,
        "unit": null,
        "type": "meanReadDepth"
      },
      {
        "value": 238,
        "unit": null,
        "type": "medianReadDepth"
      }
    ],
  },
  {
    "itemId": "sequence-2-tumor-rna",
    "tumorOrNormal": "tumor",
    "nucleicAcid": "RNA",
    "sampleMetrics": [
      {
        "value": 11928428,
        "unit": null,
        "type": "totalReadCount"
      },
      {
        "value": 9542742,
        "unit": null,
        "type": "totalMappedReadCount"
      }
    ],
    "suspectedSampleStates": [
      "degraded"
    ]
  },
  {
    "itemId": "sequence-3-normal-dna",
    "tumorOrNormal": "normal",
    "nucleicAcid": "DNA"
  }
]

```

| _____

~~V~~.VI. variants tag

This tag is used to provide information on detected gene alterations. It contains shortVariants tag, copyNumberAlterations tag, and rearrangements tag.

Key	Condition	Data type	Description
variants	optional	object	Aggregation tag for information on alterations

~~V-1~~.VI-1. shortVariants tag

This tag is used to define information on SNV (single nucleotide variation), insertion, deletion, delins (simultaneous insertion and deletion), indel (insertion and deletion), and MNV (multiple-nucleotide variation).

Key	Condition	Data type	Description
shortVariants	optional	array (length: 1-N, object)	Aggregation tag for information on single nucleotide variation (SNV), insertion (insertion), deletion (deletion), deletion and insertion (delins), insertion and deletion (indel), and multiple-nucleotide variant (MNV) of nucleotides. Each object in the array must be unique.

~~V-1-1~~.VI-1-1. Tags within shortVariants tag

key	Condition	Data type	Description
itemId	required	string regex: ^\.+\$	An ID assigned to an alteration. It must be a unique string of characters within a single case.
chromosome	required	string regex: ^[a-zA-Z0-9_\-]+\$	Chromosome number
position	required	integer	Physical position in a chromosome. Please use the 1-based coordinate system and describe according to VCF v4.3 (e.g. For example), as stated on page 13 of VCF v4.3, when the reference base is atCga and the variant base is at-ga, and C position in

			the reference base is 3, denote the physical position as "position": 2, "referenceAllele": "TC", and "alternateAllele": "T". As described below, "referenceAllele" represents a reference base and "alternateAllele" represents a variant base.)
<u>cytoband</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^.+</u> \$	<u>Cytoband where gene the alterations exists</u>
referenceAllele	required	string regex: ^[ACGTN]+\$	Reference base. Please describe according to VCF v4.3 (see the example above).
alternateAllele	required	string regex: ^[ACGTN*]+\$	Variant base. Please describe according to VCF v4.3 (see the example above). Multi-alleles – tri-alleles and more – should be listed as different elements in the shortVariants tag. In that case, indicate the itemIds and that the variants are multi-alleles in the comments tag.
alternateAlleleFrequency	required	number	Variant allele frequency (ranging from 0 to 1)
totalReadDepth	optional	integer	Total read depth (minimum value 1)
alternateAlleleReadDepth	optional	integer	Variant allele read depth (minimum value <u>0</u> <u>+</u>)
variantType	optional	string [choice]	Short variant type written in the report by the testing company. Select one from: <ul style="list-style-type: none"> • "SNV" • "insertion" • "deletion"

			<ul style="list-style-type: none"> • "delins" • "indel" • "MNV" <p>* Please inform C-CAT beforehand if you use other types.</p>
transcripts	required	array (length: 1-N, object)	<p>Information on the representative transcript. Each object in the array must be unique.</p> <p>* When creating C-CAT Findings, the sequence is scanned from the beginning and the first transcript information for each gene is used.</p>
transcriptId	required	string regex: <code>^[^\s]+\$</code>	<p>Transcription product ID (e.g., NM_000368.<u>4</u>).</p> <p>It is strongly recommended to include sub-numbers (underlined in red above) for accurate computation. If no transcriptId is present due to a mutation in an intergenic region, then you can define "transcriptId": null.</p>
transcriptDatabaseName	required	string [choice]	<p>Database of the transcript ID. Select from the following two options.</p> <ul style="list-style-type: none"> • "RefSeq" • "Ensembl" <p>If the transcriptId is null, then you can define "transcriptDatabaseName": null.</p>
transcriptDatabaseVersion	optional	string regex: <code>^.+</code>	<p>Version of the database.</p> <p>* If this is not defined, the version determined by C-CAT will be used.</p>

<u>regionStructure</u>	<u>optional</u>	<u>array (length: 1-N, object)</u>	<u>Information of the alteration's structure.</u>
<u>type</u>	<u>required</u>	<u>string [choice]</u>	<u>Additional information on gene position, as written in the testing company's report.</u> <u>Select one from:</u> <ul style="list-style-type: none"> <u>"promoter"</u> <u>"upstream"</u> <u>"downstream"</u> <u>"intergenic"</u> <u>"5'UTR"</u> <u>"3'UTR"</u> <u>"exon"</u> <u>"intron"</u> <u>* Please consult C-CAT if you want to use other types.</u>
<u>number</u>	<u>optional</u>	<u>integer</u>	<u>If "exon" or "intron" is selected for type, input the exon number or intron number.</u>
<u>totalNumber</u>	<u>optional</u>	<u>integer</u>	<u>If "exon" or "intron" is selected for type, input the total exon number or total intron number.</u>
geneSymbol	required	string regex: $^[\backslash s]^+ \$$	Name of the gene (gene symbol), as written in the testing report document by the testing company. Enter "geneSymbol": null if a gene does not exist. Enter an associated gene such as " <u>TERT promoter</u> ", " <u>TERT</u> " should be listed. The "promoter" is described in the "regionType" tag. if any.
<u>regionName</u>	<u>optional</u>	string regex: $^ \cdot + \$$	<u>Name of specific region where the anomaly alteration exists, which is as written in the testing report document by the testing company's report.</u> <u>e.g. → D4Z4 repeat</u>

<u>regionType</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<p>Additional information on gene position, as written in the testing report document by the testing company's report.</p> <p><u>Select one from:</u></p> <p><u>→ "promoter"</u></p> <p><u>→ "upstream"</u></p> <p><u>→ "downstream"</u></p> <p><u>→ "intergenic"</u></p> <p><u>→ "5'UTR"</u></p> <p><u>→ "3'UTR"</u></p> <p><u>* Please consult C-CAT if you want to use other types.</u></p>
strand	optional	string [choice]	<p>Direction of transcription.</p> <p>If the orientation is the same as that of the reference genome sequence, it is "+"; if the orientation is opposite, it is "-".</p> <p>If the transcriptId is null, then you can define "strand": null.</p>
cdsChange	required	string regex: ^\.+\$	<p>Enter changes at the DNA level, as written in the testing company's report.</p> <p><u>In principle, the notation</u>cdsChange should – shall conform to the <u>HGVS. Notation in HGVS is recommended.</u></p> <p>When an RNA is not transcribed as in an intergenic region, you can input null (in addition to the notation of non-coding regions such as n.*).</p>
aminoAcidsChange	required	string regex: ^\.+\$	<p>Enter changes at the protein level, as written in the testing company's report.</p> <p><u>Amino acids should</u>shall be <u>written</u>indicated with a single</p>

			<p><u>letter. In principle, other amino acids should, in principle, comform to be described in accordance with the HGVS. Notation in HGVS is recommended.</u></p> <p>If no change is observed in amino acids as in an untranslated region, you can input null.</p>
calculatedEffects	optional	<p>array (length: 0-N, string regex: ^.+)\$</p>	<p>Note the effects of alterations on transcripts, such as "splicing_variant", using Sequence Ontology terms. This field corresponds to "Effect (Sequence Ontology)" of the snpEff tool and VCF "Func.refGene" of the annovar tool. For annovar, this is explained at Output file 1 (refSeq gene annotation) on Gene-based Annotation in User Guide, whereby terms provided by annovar can be converted to Sequence Ontology terms. One term should be assigned to each element of an array. Each string in the array must be unique.</p>

sampleItemId	required	string regex: ^.+	Described the itemId of sequencing sample information (sequencing Samples). Represents sample information in which the mutation was detected.
variantOrigin	optional	string [choice]	<p>Somatic or germline origin.</p> <p>* C-CAT uses a different cancer knowledge base, according to whether alterations are somatic or germline. If no input is provided, the knowledge base for somatic alterations is used.</p> <ul style="list-style-type: none"> • "somatic": derived from somatic cells • "germline": derived from germline cells • "likely somatic": typically in a tumor-only test, the alteration is likely to be somatic, and the knowledge base for somatic alterations is used. • "likely germline": typically in a tumor-only test, the alteration is likely to be germline, and the knowledge base for germline alterations is used.
matched	optional	boolean	Whether or not the variant is identified using both tumor and matched-normal samples.
<u>approved</u>	<u>optional</u>	<u>boolean</u>	<p><u>Whether the mutationvariant is listed as approved information (true) or as reference information not (false) in the testinglaboratory company's test result report or equivalent reports.</u></p> <p><u>(Default: true)</u></p>

<u>grade</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<p>The variant detection grade of the variant mutation treated as stated in the testing laboratory company's report of test results or the other related relevant report sequivalent.</p> <p>Select one from:</p> <ul style="list-style-type: none"> • "clear": unambiguous detection • "equivocal": ambiguity remains inequivocal detection, such as low confidence • "suppl": supplementary to express information related to the variants attached to mutations regardless of the accuracy of for degree of ambiguity of the detection. (Default: "clear") <p>* In the case of For clear or equivocal, the variant is annotated with cancer knowledge base. Please consult C-CAT beforehand if you use want to use other types.</p>
reported	required	boolean	<p>Whether or not the alteration is reported in testing company's ' s report or similar documents.</p> <p>* When In case of it is true, the variant is outputted to C-CAT finding documents survey results When it is true, annotation is made based on the cancer knowledge base.</p>

V-1-2.VI-1-2. Example of shortVariants tag

```
(Example1. for SNV)
{
  "itemId": "variant-1",
```

Note: The itemId is a character string at the discretion of the testing company for the detected variant.

```
"chromosome": "9",  
"position": 135781005,  
"cytoband": "q34.13",  
"referenceAllele": "C",  
"alternateAllele": "G",
```

Note: Describe "position" and "referenceAllele", "alternateAllele" according to the rules of VCF v4.3.

```
"alternateAlleleFrequency": 0.54,  
"alternateAlleleReadDepth": 108,  
"totalReadDepth": 200,  
"variantType": "SNV",  
"transcripts": [  
  {  
    "transcriptId": "NM_000368.4",  
    "transcriptDatabaseName": "RefSeq",  
    "transcriptDatabaseVersion": "Release 99",  
    "regionStructure": [  
      {  
        "type": "exon",  
        "number": 15,  
        "totalNumber": 23  
      }  
    ],  
    "geneSymbol": "TSC1",  
    "cdsChange": "c.1960C>G",  
    "aminoAcidsChange": "p.Q654E",  
    "calculatedEffects": [  
      "missense_variant"  
    ]  
  }  
],  
"sampleItemId": "sequence-1-tumor-dna",  
"variantOrigin": "somatic",  
"matched": true,  
"reported": true  
}
```

(Example2. for insertion)

```
{
  "itemId": "variant-24",
  "chromosome": "8",
  "position": 37553560,
  "cytoband": "p11.23",
  "referenceAllele": "A",
  "alternateAllele": "AAGCGGC",
  "alternateAlleleFrequency": 0.4953,
  "alternateAlleleReadDepth": 368,
  "totalReadDepth": 743,
  "variantType": "insertion",
  "transcripts": [
    {
      "transcriptId": "NM_025069.2",
      "transcriptDatabaseName": "RefSeq",
      "transcriptDatabaseVersion": "Release 99",
      "regionStructure": [
        {
          "type": "exon",
          "number": 1,
          "totalNumber": 2
        }
      ],
      "geneSymbol": "ZNF703",
      "cdsChange": "c.63_64insAGCGGC",
      "aminoAcidsChange": "G21_G22insSG"
    }
  ],
  "sampleItemId": "sequence-1-tumor-dna",
  "variantOrigin": "somatic",
  "matched": true,
  "reported": true
}
```

(Example3. for deletion)

```
{
  "itemId": "variant-32",
  "chromosome": "1",
  "position": 27097751,
  "cytoband": "p.36.11",
  "referenceAllele": "TC",
  "alternateAllele": "T",
  "alternateAlleleFrequency": 0.1203,
  "alternateAlleleReadDepth": 32,
  "totalReadDepth": 266,
  "variantType": "deletion",
  "transcripts": [
    {
      "transcriptId": "ENST00000324856.13",

```

```

"transcriptDatabaseName": "Ensembl",
"transcriptDatabaseVersion": "v99",
"regionStructure": [
{
  "type": "exon",
  "number": 12,
  "totalNumber": 20
}
],
"geneSymbol": "ARID1A",
"cdsChange": "c.3340delC",
"aminoAcidsChange": "p.P1115fs*46",
"calculatedEffects": [
  "frameshift_variant"
]
}
],
"transcripts": {
  "transcriptId": "ENST00000324856.13",
  "transcriptDatabaseName": "Ensembl",
  "transcriptDatabaseVersion": "v99",
  "geneSymbol": "ARID1A",
  "cdsChange": "c.3340delC",
  "aminoAcidsChange": "p.P1115fs*46",
  "calculatedEffects": [
    "frameshift_variant"
  ]
}
},
  "sampleItemId": "sequence-3-normal-dna",
  "variantOrigin": "somatic",
  "matched": true,
  "reported": true
}

```


(Example4. for delins)

```
{
  "itemId": "variant-46",
  "chromosome": "1",
  "position": 26696982,
  "cytoband": "p36.11",
  "referenceAllele": "GC",
  "alternateAllele": "TT",
  "alternateAlleleFrequency": 0.099325,
  "alternateAlleleReadDepth": 52,
  "totalReadDepth": 524,
  "variantType": "delins",
  "transcripts": [
    {
      "transcriptId": "NM_0060157294.64",
      "transcriptDatabaseName": "RefSeq",
      "transcriptDatabaseVersion": "Release 99",
      "regionStructure": [
        {
          "type": "exon",
          "number": 1,
          "totalNumber": 20
        }
      ],
      "geneSymbol": "ARID1ABRCA1",
      "cdsChange": "c.579_580delinsTT",
      "aminoAcidsChange": "p.E193_P194delinsDS"
    }
  ],
  "transcripts": {
    "transcriptId": "NM_007294.4",
    "transcriptDatabaseName": "RefSeq",
    "transcriptDatabaseVersion": "Release 99",
    "geneSymbol": "BRCA1",
    "cdsChange": "c.579_580delinsTT",
    "aminoAcidsChange": "p.E193_P194delinsDS"
  },
  "sampleItemId": "sequence-1-tumor-dna",
  "variantOrigin": "somatic",
  "matched": true,
  "reported": true
}
```

(Example5. for "TERT promoter")

```
{
  "itemId": "variant-5",
  "chromosome": "5",
  "position": 1295113,
  "cytoband": "p15.33",
```

```

"referenceAllele": "G",
"alternateAllele": "A",
"alternateAlleleFrequency": 0.163,
"alternateAlleleReadDepth": 15-9,
"totalReadDepth": 92,
"variantType": "SNV",
"transcripts": [
  {
    "transcriptId": "ENST00000310581.9",
    "transcriptDatabaseName": "Ensembl",
    "transcriptDatabaseVersion": "Release 99",
    "regionStructure": [
      {
        "type": "promoter"
      }
    ],
    "geneSymbol": "TERT",
    "regionName": "TERT promoter",
    "regionType": "promoter",
    "cdsChange": "n.1295113C>T",
    "aminoAcidsChange": null,
    "calculatedEffects": [
      "TF_binding_site_variant"
    ]
  }
],
"transcripts": {
  "transcriptId": "ENST00000310581.9",
  "transcriptDatabaseName": "Ensembl",
  "transcriptDatabaseVersion": "Release 99",
  "geneSymbol": "TERT",
  "cdsChange": "n.1295113C>T",
  "aminoAcidsChange": null,
  "calculatedEffects": [
    "TF_binding_site_variant"
  ]
},
"sampleItemId": "sequence-1-tumor-dna",
"variantOrigin": "somatic",
"matched": true,
"reported": true
}

```

~~V-2~~.VI-2. copyNumberAlterations tag

This tag is used to provide information on copy number alterations (CNAs).

Key	Condition	Data type	Description
-----	-----------	-----------	-------------

copyNumberAlterations	optional	array (length: 1-N, object)	Aggregation tag for information on copy number alterations (CNAs). Each object in the array must be unique.
-----------------------	----------	--------------------------------	--

~~V-2-1~~.VI-2-1. Tags within copyNumberAlterations tag

Key	Condition	Data type	Description
itemId	required	string regex: ^\.+\$	An ID assigned to an alteration. It must be a unique string of characters within a single case.
chromosome	optional	string regex: ^[a-zA-Z0-9_\\-]+\$	Chromosome number
startPosition	optional	integer	Physical starting position in a chromosome. Please use the 1-based coordinate system.
<u>startCytoband</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^\.+\$</u>	<u>Cytoband at the starting position</u>
endPosition	optional	integer	Physical ending position in a chromosome. Please use the 1-based coordinate system.

<u>endCytoband</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>Cytoband at the ending position</u>
copyNumberMetrics	optional	array (length: 0-N, object)	Measurements and units of the copy number alteration. Array of objects composed of two keys, value and unit. If there are two or more values in different units, register them as an array with the length of 2 or more. Each object in the array must be unique.
value	required	number	Aberrated copy number measurement
unit	required	string [choice]	Unit for measured value. Select one from: <ul style="list-style-type: none"> • "copy number": Copy number • "fold-change": Ratio of (standardized) reading depth of tumor samples to normal samples • "log2 fold-change": log2 transformation of "fold-change" • "fraction-of-gene": fraction of a CNA region to the gene region of interest * Please consult C-CAT if you want to use other units.
copyNumberAlterationType	required	string [choice]	CNA type written in the report by the testing company. Select one from: <ul style="list-style-type: none"> • "amplification" • "gain" • "duplication" • "loss" • "deletion" • "homozygous deletion" • "neutral" * Please consult C-CAT if you want to use other types.
transcripts	required	array (length: 1-N, object)	Refer to the description in the shortVariants tag.

transcriptId	optional	string regex: ^[^\s]+\$	Refer to the description in the shortVariants tag.
transcriptDatabaseName	optional	string [choice]	Refer to the description in the shortVariants tag. If the transcriptId is entered, this key is recommended to input as well.
transcriptDatabaseVersion	optional	string regex: ^\.+\$	Refer to the description in the shortVariants tag.
<u>regionStructure</u>	<u>optional</u>	<u>array (length: 1-N, object)</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>type</u>	<u>required</u>	<u>string [choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>number</u>	<u>optional</u>	<u>integer</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>totalNumber</u>	<u>optional</u>	<u>integer</u>	<u>Refer to the description in the shortVariants tag.</u>
geneSymbol	required	string regex: ^[^\s]+\$	Refer to the description in the shortVariants tag.
<u>regionName</u>	<u>optional</u>	<u>string regex: ^\.+\$</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>regionType</u>	<u>optional</u>	<u>string [choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
strand	optional	string [choice]	Refer to the description in the shortVariants tag.
cdsChange	optional	string regex: ^\.+\$	Refer to the description in the shortVariants tag.
aminoAcidsChange	optional	string regex: ^\.+\$	Refer to the description in the shortVariants tag.

calculatedEffects	optional	array (length: 0-N, string regex: ^.+)\$)	Refer to the description in the shortVariants tag.
sampleItemId	required	string regex: ^.+\$\$	Refer to the description in the shortVariants tag.
variantOrigin	optional	string [choice]	Refer to the description in the shortVariants tag.
matched	optional	boolean	Refer to the description in the shortVariants tag.
<u>approved</u>	<u>optional</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>grade</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
reported	required	boolean	Refer to the description in the shortVariants tag.

~~V-2-2. Example of copyNumberAlterations tag~~

VI-2-2. Example of copyNumberAlterations tag

(Example)

```
{
  "itemId": "variant-9",
  "chromosome": "1",
  "startPosition": 8921059,
  "startCytoband": "p36.23",
  "endPosition": 8939151,
  "endCytoband": "p36.23",
"startPosition": 8921059,
"endPosition": 8939151,
  "copyNumberMetrics": [
    {
      "value": 0.2309,
      "unit": "fold-change"
    },
    {
      "value": -2.1147,
      "unit": "log2 fold-change"
    }
  ],
  "copyNumberAlterationType": "loss",
  "transcripts": [
```

```

{
  "transcriptDatabaseName": "RefSeq",
  "transcriptDatabaseVersion": "Release 99",
  "geneSymbol": "EN01"
},
{
  "sampleItemId": "sequence-1-tumor-dna",
  "variantOrigin": "somatic",
  "matched": true,
  "reported": false
}

```

~~V-3-1~~ VI-3. rearrangements tag

This tag is used to provide information on rearrangements such as fusions, duplications, large deletions, and inversions.

Key	Condition	Data type	Description
rearrangements	optional	array (length: 1-N, object)	Aggregation tag for information on rearrangements, such as fusions, duplications, large deletions, and inversions. Each object in the array must be unique.

~~V-3-1~~ VI-3-1. Tags within rearrangements tag

Key	Condition	Data type	Description
itemId	required	string regex: ^\.+\$	An ID assigned to an alteration. It must be a unique string of characters within a single case.
breakends	required	array (length: 2, object)	Two breakends of the rearrangement. Each object in the array must be unique.
chromosome	required	string regex: ^[a-zA-Z0-9_\-]+\$	Chromosome number
startPosition	required	integer	Physical starting position in a chromosome. Please use the 1-based coordinate system.

<u>startCytoband</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>Cytoband at the starting position</u>
endPosition	required	integer	Physical ending position in a chromosome. Please use the 1-based coordinate system.
<u>endCytoband</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>Cytoband at the ending position</u>
matePieceLocation	optional	string [choice]	If the sequence of interest is bound to another sequence on the upstream (or downstream) of this sequence of interest along the reference genome sequence, it is input as "upstream" (or " <u>u</u> -downstream" <u>d</u>). Regarding gene fusions and other rearrangements ("rearrangementType": "other"), it is strongly recommended to input this key for accurately identifying the genomic changes. See " <u>XVII</u> -2. matePieceLocation" below for a detailed explanation.
supportingReadCount	optional	integer	The number of reads that support the breakends, or the numerator of alternateAlleleFrequency.
totalReadCount	optional	integer	The total number of reads that support and do not support breakends, or the denominator of alternateAlleleFrequency.
alternateAlleleFrequency	optional	number	Variant allele frequency of a breakend (ranging from 0 to 1). Please input a variant allele frequency calculated for each breakend.

transcripts	required	array (length: 1-N, object)	Refer to the description in the shortVariants tag.
transcriptId	optional	string regex: ^[^\s]+\$	Refer to the description in the shortVariants tag.
transcriptDatabase Name	optional	string [choice]	Refer to the description in the shortVariants tag. If the transcriptId is entered, this key is recommended to input as well.
transcriptDatabase Version	optional	string regex: ^\.+\$	Refer to the description in the shortVariants tag.
<u>regionStructure</u>	<u>optional</u>	<u>array (length: 1-N, object)</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>type</u>	<u>required</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>number</u>	<u>optional</u>	<u>integer</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>totalNumber</u>	<u>optional</u>	<u>integer</u>	<u>Refer to the description in the shortVariants tag.</u>
geneSymbol	required	string regex: ^[^\s]+\$	Refer to the description in the shortVariants tag.
<u>regionName</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^\.+\$</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>regionType</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
strand	optional	string [choice]	Refer to the description in the shortVariants tag.

cdsChange	optional	string regex: ^.+ \$	Refer to the description in the shortVariants tag.
aminoAcidsChange	optional	string regex: ^.+ \$	Refer to the description in the shortVariants tag.
calculatedEffects	optional	array (length: 0-N, string regex: ^.+ \$)	Refer to the description in the shortVariants tag.
orderedGenePairs	optional	array (length: 0-N, array)	<p>An array of an ordered pair(s) of gene names that traverses a breakpoint of a rearrangement, where the pair(s) is written in the transcriptional order.</p> <p>This array has, as a child element(s), an array(s) in length 2 that stores a pair of geneSymbols of transcripts. The geneSymbols in each pair should be aligned in the transcriptionally forward direction and should be unique. For example, for geneSymbols A and B, if A is in the upstream of transcription and B is the downstream, it is represented as</p> <p><code>"orderedGenePairs": [["A", "B"]]</code>.</p> <p>* This directional information is taken into account in the cancer knowledge base search. For example, in the case of [["A", "B"]], ["A", "B"] alone is searched. In the case of [["A", "B"], ["B", "A"]], both ["A", "B"] and ["B", "A"] are respectively searched. You can control the search in more detail, such as by [["A", "B"], ["B", "A"], ["C", "B"]].</p>

			<p><u>* Please specify such an appropriate input in this tag if you want to control how gene pairs are searched.</u></p> <p>* If this tag is omitted, the pair of geneSymbols under the breakends tag is treated as a pair without information on the transcriptional direction, and both direction of the pair will be respectively searched in the knowledge base.</p>
(Child element of orderedGenePairs)	required	array (length: 2, string regex: ^.+)\$	<p>An array of strings of length 2 with the geneSymbol described in transcripts aligned in the forward direction of transcription.</p> <p>e.g.) [<u>"EML4"</u>, <u>"ALK"</u>]</p>
skippedExonRanges	optional	array (length: 1-N, object)	<p>Exon information skipped by rearrangement.</p> <p>If "exon skipping" is selected for rearrangementType, this key is recommended to input as well.</p>
transcriptId	required	string regex: ^[^\s]+\$	Refer to the description in the shortVariants tag.
transcriptDatabaseName	required	string [choice]	<p>Refer to the description in the shortVariants tag.</p> <p>If the transcriptId is entered, this key is recommended to input as well.</p>

transcriptDatabaseVersion	optional	string regex: ^.+	Refer to the description in the shortVariants tag.
geneSymbol	required	string regex: ^[^\s]+	Refer to the description in the shortVariants tag.
strand	optional	string [choice]	Refer to the description in the shortVariants tag.
exonRange	required	array (length: 2, integer)	Range of skipped exon numbers. Start and end exon numbers are included in the range.
<u>totalExonNumber</u>	<u>optional</u>	<u>integer</u>	<u>Total exon number.</u>
insertedSequence	optional	string regex: ^[ACGTN]+	Sequence inserted between the two breakends of the genome sequence. If an inserted sequence does not exist, input null.
supportingReadCount	optional	integer	The number of reads that support rearrangement, or the numerator of alternateAlleleFrequency.
totalReadCount	optional	integer	The total number of reads that support and do not support rearrangement, or the denominator of alternateAlleleFrequency.
alternateAlleleFrequency	optional	number	Variant allele frequency of a rearrangement (ranging from 0 to 1). Please input a value calculated for a rearrangement.
expressionLevelMetrics	optional	array (length: 1-N, object)	Information on expression levels in RNA-seq. Each object in the array must be unique.
value	required	number	Value of an expression level
unit	required	string [choice]	Unit of an expression level. Select one from the following options: <ul style="list-style-type: none"> • "TPM" • "FPKM" • "FPM" • "RPKM"

			<ul style="list-style-type: none"> • "RPM" <p>* Please consult C-CAT if you want to use other units.</p>
statisticType	optional	string [choice]	<p>Type of summary statistics. Select one from the following options:</p> <ul style="list-style-type: none"> • "mean" • "median" • "standard deviation" <p>(Default: null)</p> <p>If the expression level represents a measured value (not a summary statistic), you can input null.</p> <p>* Please consult C-CAT if you want to use other choices.</p>
sampleSize	optional	integer	<p>Sample size when calculating summary statistics.</p> <p>* If a non-null value is inputted in statisticType, it is recommended to input this item as well.</p> <p>(Default: false)</p>
isControl	optional	boolean	<p>Whether the expression level was taken from a control (normal) sample (true) or from a tumor sample (false).</p> <p>(Default: false)</p>
rearrangementNames	optional	array (length: 0-N, string regex: ^\.[a-zA-Z0-9_]+)\$	<p>Individual rearrangement name given by the testing company. For example, "EML4-ALK fusion"</p> <p>Each string in the array must be unique.</p>
rearrangementType	required	string [choice]	<p>Rearrangement type written in the report by the testing company.</p> <p>Select one from:</p> <ul style="list-style-type: none"> • "gene fusion" • "gene fusion and frameshift variant" • "bidirectional gene fusion" • "duplication" • "tandem duplication" • "deletion" • "inversion"

			<ul style="list-style-type: none"> • "truncation" • "splice variant" • "exon skipping" • <u>"translocation"</u> • "other" <p>* Please consult C-CAT if you want to use other types.</p>
sampleItemId	required	string regex: ^.+	Refer to the description in the shortVariants tag.
variantOrigin	optional	string [choice]	Refer to the description in the shortVariants tag.
matched	optional	boolean	Refer to the description in the shortVariants tag.
<u>approved</u>	<u>optional</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>grade</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
reported	required	boolean	Refer to the description in the shortVariants tag.

V-3-2.VI-3-2. Example of rearrangements tag

(Example1. In cases where orderedGenePairs is present)

```
{
  "itemId": "variant-13",
  "breakends": [
    {
      "chromosome": "2",
      "startPosition": 42510050,
      "startCytoband": "p21",
      "endPosition": 42510050,
      "endCytoband": "p21",
      "startPosition": 42510050,
      "endPosition": 42510050,
      "matePieceLocation": "downstream",
      "transcripts": [
        {
          "transcriptId": "NM_001145076.3",

          "transcriptDatabaseName": "RefSeq",
          "transcriptDatabaseVersion": "Release 99",
          "regionStructure": [
            "type": "exon",
```

```

        "number": 7,
        "totalNumber": 22
    ],
    "geneSymbol": "EML4"
  }
],
{
  "chromosome": "2",
  "startPosition": 29445240,
  "startCytoband": "p23.2",
  "endPosition": 29445240,
  "endCytoband": "p23.2",
  "endPosition": 29445240,
  "matePieceLocation": "upstream",
  "transcripts": [
    {
      "transcriptId": "NM_001353765.2",
      "transcriptDatabaseName": "RefSeq",
      "transcriptDatabaseVersion": "Release 99",
      "regionStructure": [
        "type": "exon",
        "number": 3,
        "totalNumber": 10
      ],
      "geneSymbol": "ALK"
    }
  ]
},
"orderedGenePairs": [
  ["EML4", "ALK"]
],
"supportingReadCount": 30,
"totalReadCount": 430,
"alternateAlleleFrequency": 0.07,
"rearrangementType": "gene fusion",
"sampleItemId": "sequence-1-tumor-dna",
"variantOrigin": "somatic",
"matched": true,
"reported": false
}

```

(Example2. When describing the totalReadCount and alternateAlleleFrequency for each breakend)

```

{
  "itemId": "variant-14",
  "breakends": [
    {
      "chromosome": "2",

```

```

      "startPosition": 42510050,
      "startCytoband": "p21",
      "endPosition": 42510050,
      "endCytoband": "p21",
      "startPosition": 42510050,
      "endPosition": 42510050,
      "matePieceLocation": "downstream",
      "totalReadCount": 330,
      "alternateAlleleFrequency": 0.06,
      "transcripts": [
        {
          "transcriptId": "NM_001145076.3",
          "transcriptDatabaseName": "RefSeq",
          "transcriptDatabaseVersion": "Release 99",
          "regionStructure": [
            "type": "exon",
            "number": 7,
            "totalNumber": 22
          ],
          "geneSymbol": "EML4"
        }
      ],
    },
    {
      "chromosome": "2",
      "startPosition": 29445240,
      "startCytoband": "p23.2",
      "endPosition": 29445240,
      "endCytoband": "p23.2",
      "startPosition": 29445240,
      "endPosition": 29445240,
      "matePieceLocation": "upstream",
      "totalReadCount": 570,
      "alternateAlleleFrequency": 0.07,
      "transcripts": [
        {
          "transcriptId": "NM_001353765.2",
          "transcriptDatabaseName": "RefSeq",
          "transcriptDatabaseVersion": "Release 99",
          "regionStructure": [
            "type": "exon",
            "number": 3,
            "totalNumber": 10
          ],
          "geneSymbol": "ALK"
        }
      ]
    }
  ],
  "orderedGenePairs": [
    ["EML4", "ALK"]
  ]

```



```

],
"supportingReadCount": 30,
"rearrangementType": "gene fusion",
"sampleItemId": "sequence-1-tumor-dna",
"variantOrigin": "somatic",
"matched": true,
"reported": false
}

```

(Example3. In cases where insertedSequence is present)

```

{
  "itemId": "variant-15",
  "breakends": [
    {
      "chromosome": "14",
      "startPosition": 234567,
      "startCytoband": "p13",
      "endPosition": 234567,
      "endCytoband": "p13",
      "startPosition": 234567,
      "endPosition": 234567,
      "matePieceLocation": "downstream",
      "transcripts": [
        {
          "transcriptId": null,
          "transcriptDatabaseName": "RefSeq",
          "transcriptDatabaseVersion": "Release 99",
          "geneSymbol": null
        }
      ]
    },
    {
      "chromosome": "2",
      "startPosition": 321672,
      "startCytoband": "p25.3",
      "endPosition": 321672,
      "endCytoband": "p25.3",
      "startPosition": 321672,
      "endPosition": 321672,
      "matePieceLocation": "upstream",
      "transcripts": [
        {
          "transcriptId": null,
          "transcriptDatabaseName": "RefSeq",
          "transcriptDatabaseVersion": "Release 99",
          "geneSymbol": "LINC01865"
        }
      ]
    }
  ],
  "insertedSequence": "GTNNNNNCAT",

```

```

"supportingReadCount": 30,
"alternateAlleleFrequency": 0.07,
"rearrangementType": "other",
"sampleItemId": "sequence-1-tumor-dna",
"variantOrigin": "somatic",
"matched": true,
"reported": false
}

```

(Example4. In cases of exon skipping)

```

{
  "itemId": "variant-16",
  "breakends": [
    {
      "chromosome": "7",
      "startPosition": 116771654,
      "startCytoband": "p22.1",
      "endPosition": 116771654,
      "endCytoband": "p22.1",
      "startPosition": 116771654,
      "endPosition": 116771654,
      "transcripts": [
        {
          "transcriptId": "NM_000245",
          "transcriptDatabaseName": "RefSeq",
          "transcriptDatabaseVersion": "Release 99",
          "regionStructure": [
            {
              "type": "exon",
              "number": 13,
              "totalNumber": 21
            }
          ],
          "geneSymbol": "MET"
        }
      ]
    },
    {
      "chromosome": "7",
      "startPosition": 116774881,
      "startCytoband": "p22.1",
      "endPosition": 116774881,
      "endCytoband": "p22.1",
      "startPosition": 116774881,
      "endPosition": 116774881,
      "transcripts": [
        {
          "transcriptId": "NM_000245",
          "transcriptDatabaseName": "RefSeq",
          "transcriptDatabaseVersion": "Release 99",
          "regionStructure": [

```

```

    {
      "type": "exon",
      "number": 15,
      "totalNumber": 21
    }
  ],
  "geneSymbol": "MET"
}
],
{
  "skippedExonRanges": [
    {
      "transcriptId": "NM_000245",
      "transcriptDatabaseName": "RefSeq",
      "transcriptDatabaseVersion": "Release 99",
      "geneSymbol": "MET",
      "exonRange": [14, 14],
      "totalExonNumber": 21
    }
  ],
  "supportingReadCount": 30,
  "alternateAlleleFrequency": 0.07,
  "rearrangementType": "exon skipping",
  "sampleItemId": "sequence-2-tumor-rna",
  "variantOrigin": "somatic",
  "matched": false,
  "reported": true
}

```

(Example5. In cases of translocation)

```
{
  "itemId": "variant-17",
  "breakends": [
    {
      "chromosome": "14",
      "startPosition": 105857793,
      "startCytoband": "p11.2",
      "endPosition": 105857793,
      "endCytoband": "p11.2",
      "matePieceLocation": "downstream",
      "transcripts": [
        {
          "transcriptId": null,
          "transcriptDatabaseName": null,
          "geneSymbol": "IGH",
          "regionName": "IGH"
        }
      ]
    },
    {
      "chromosome": "8",
      "startPosition": 127735729,
      "startCytoband": "p11.23",
      "endPosition": 127735729,
      "endCytoband": "p11.23",
      "matePieceLocation": "upstream",
      "transcripts": [
        {
          "transcriptId": null,
          "transcriptDatabaseName": null,
          "regionStructure": [
            {
              "type": "upstream"
            }
          ],
          "geneSymbol": "MYC",
          "regionType": "upstream"
        }
      ]
    }
  ],
  "supportingReadCount": 120,
  "totalReadCount": 435,
  "alternateAlleleFrequency": 0.31,
  "rearrangementType": "translocation",
  "sampleItemId": "sequence-1-tumor-dna",
  "variantOrigin": "somatic",
  "matched": false,
  "reported": true
}
```

| _____

[VII.1.](#) otherBiomarkers tag

This tag is used to provide information on biomarkers other than alterations defined in the variants tag. Currently, Micro-Satellite Instability (MSI), Tumor Mutation Burden (TMB), and Loss Of Heterozygosity (LOH) can be noted.

Key	Condition	Data type	Description
otherBiomarkers	optional	array (length: 0-N, object)	Aggregation tag for information on biomarkers. Each object in the array must be unique.

[VII.1.1.](#) Tags within otherBiomarkers tag

Key	Condition	Data type	Description
itemId	required	string regex: ^.+\$	An ID assigned to a biomarker. It must be a unique string of characters within a single case.
biomarkerType	required	string [choice]	Type of biomarkers. Select one from: <ul style="list-style-type: none"> • "TMB": Tumor Mutation Burden • "MSI": Micro-Satellite Instability • "LOH": Loss Of Heterozygosity * Inform C-CAT for other biomarkers.
biomarkerMetrics	optional	array (length: 0-N, object)	Inspection value information. Each object in the array must be unique. * When creating C-CAT Findings, the first object in the array is used first .
value	required	number	Measured value e.g.) 5.15
unit	required	string regex: ^.+\$	Unit for the measured value. Units may vary depending on test types. e.g.) % If the inspection value is a scalar, you can input null.
metricType	required	string regex: ^.+\$	Type of inspection value. e.g.) Mutations per megabase MSIsensor score percentage of MSI sites

state	optional	string [choice]	<p>Select the biomarker status from the following options.</p> <ul style="list-style-type: none"> • "high" • "low" • "intermediate" • "stable" • "cannot be determined" <p>If the test was performed but the result is not listed above, describe null.</p> <p>* Inform C-CAT for other options.</p>
descriptions	optional	array (length: 0-N, string regex: ^.+)\$	<p>Descriptions such as how to obtain the testing value and the meaning of the value.</p> <p>Refer to the contents tag within the comments tag for usable languages and new lines.</p>
biomarkerOrigin	optional	string [choice]	Refer to the description in the shortVariants tag.
sampleItemId	required	string regex: ^.+)\$	Refer to the description in the shortVariants tag.
matched	optional	boolean	Refer to the description in the shortVariants tag.
<u>approved</u>	<u>optional</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>grade</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
reported	required	boolean	Refer to the description in the shortVariants tag.

VI-2.VII-2. Example of otherBiomarkers tag

(Example)

```

"otherBiomarkers": [
  {
    "itemId": "biomarker-1",
    "biomarkerType": "MSI",
    "biomarkerMetrics": [
      {
        "value": 5.15,
        "unit": "%",
        "metricType": "percentage of MSI sites"
      },
    ],
  },
]

```

```

    {
      "value": 2,
      "unit": null,
      "metricType": "MSI sensor score"
    }
  ],

```

Note: If one inspection item has values in multiple units, use array notation in the "biomarkerMetrics" tag.

```

    "state": "stable",
    "descriptions": [
      "MSI sensor score 10 points or more was MSI-H, 3 points or more and less than 10 points was indeterminate (MSI-I), and less than 3 points was microsatellite stable (MSS).",
      "https://www.gi-cancer.net/gi/ronbun/archives/201901-01.html"
    ],
    "sampleItemId": "sequence-1-tumor-dna",
    "matched": true,
    "reported": true
  },
  {
    "itemId": "biomarker-2",
    "biomarkerType": "TMB",
    "biomarkerMetrics": [
      {
        "value": 34.5680122,
        "unit": "Muts/Mb",
        "metricType": "Mutations per megabase"
      }
    ],
    "state": "high",
    "sampleItemId": "sequence-1-tumor-dna",
    "reported": true
  },
  {
    "itemId": "biomarker-3",
    "biomarkerType": "LOH",
    "biomarkerMetrics": [
      {
        "value": 24.14,
        "unit": "%",
        "metricType": "LOH score"
      }
    ],
    "state": "intermediate",
    "sampleItemId": "sequence-1-tumor-dna",
    "reported": true
  }
]

```


VIII. expressions tag

This tag is used to provide the information on gene expression.

<u>Key</u>	<u>Condition</u>	<u>Data type</u>	<u>Description</u>
<u>expressions</u>	<u>optional</u>	<u>array (length: 1-N, object)</u>	<u>Aggregation tag for information on gene expressions.</u> <u>Each object in the array must be unique.</u>

VIII-1. Tags within expressions tag

<u>Key</u>	<u>Condition</u>	<u>Data type</u>	<u>Description</u>
<u>itemId</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>An ID assigned to an expression.</u> <u>It must be a unique string of characters within a single case.</u>
<u>readCount</u>	<u>optional</u>	<u>integer</u> <u>number</u>	<u>Number of reads</u>
<u>transcripts</u>	<u>required</u>	<u>array</u> <u>(length: 1-N, object)</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>transcriptId</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^[^\s]+ \$</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>transcriptDatabaseName</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u> <u>If the transcriptId is entered, this key is recommended to input as well.</u>
<u>transcriptDatabaseVersion</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>regionStructure</u>	<u>optional</u>	<u>array</u> <u>(length: 1-N, object)</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>type</u>	<u>required</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>number</u>	<u>optional</u>	<u>integer</u>	<u>Refer to the description in the shortVariants tag.</u>

<u>totalNumber</u>	<u>optional</u>	<u>integer</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>geneSymbol</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^[^\s]+\$</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>regionName</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^.+</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>regionType</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>strand</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>cdsChange</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^.+</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>aminoAcidsChange</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^.+</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>calculatedEffects</u>	<u>optional</u>	<u>array</u> <u>(length: 0-N, string</u> <u>regex:</u> <u>^.+)</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>expressionLevelMetrics</u>	<u>required</u>	<u>array</u> <u>(length: 1-N, object)</u>	<u>Refer to the description in the rearrangements tag.</u>
<u>value</u>	<u>required</u>	<u>number</u>	<u>Refer to the description in the rearrangements tag.</u>
<u>unit</u>	<u>required</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the rearrangements tag.</u>
<u>statisticType</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the rearrangements tag.</u>
<u>sampleSize</u>	<u>optional</u>	<u>integer</u>	<u>Refer to the description in the rearrangements tag.</u>

<u>isControl</u>	<u>optional</u>	<u>boolean</u>	<u>Refer to the description in the rearrangements tag.</u>
<u>sampleItemId</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>approved</u>	<u>optional</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>grade</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>reported</u>	<u>required</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag.</u>

VIII-2. Example of expressions tag

(Example)

```
"expressions": [  
  {  
    "itemId": "expression-1",  
    "readCount": 9928,  
    "transcripts": [  
      {  
        "transcriptDatabaseName": "RefSeq",  
        "transcriptDatabaseVersion": "Release 99",  
        "geneSymbol": "MET"  
      }  
    ],  
    "expressionLevelMetrics": [  
      {  
        "value": 28.24,  
        "unit": "TPM",  
        "isControl": false  
      },  
      {  
        "value": 142.7,  
        "unit": "TPM",  
        "statisticType": "mean",  
        "sampleSize": 20,  
        "isControl": true  
      },  
      {  
        "value": 134.2,  
        "unit": "TPM",  
        "statisticType": "standard deviation",  
        "sampleSize": 20,  
        "isControl": true  
      }  
    ],  
    "sampleItemId": "sequence-4-normal-rna",  
    "reported": true  
  }  
]
```

IX. armLevelChanges tag

This tag is used to provide the information about chromosome – chromosome arm change.

<u>Key</u>	<u>Condition</u>	<u>Data type</u>	<u>Description</u>
<u>armLevelChanges</u>	<u>optional</u>	<u>array (length: 1-N, object)</u>	<u>Aggregation tag for armLevelChange information.</u> <u>Each object in the array must be unique.</u>

IX-1. Tags within armLevelChanges tag

<u>Key</u>	<u>Condition</u>	<u>Data type</u>	<u>Description</u>
<u>itemId</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>An ID assigned to chromosome – chromosome arm change.</u> <u>It must be a unique string of characters within a single case.</u>
<u>armLevelChangeType</u>	<u>required</u>	<u>string</u> <u>[choice]</u>	<u>Type of the change for chromosome or chromosome arm level change.</u> <u>Select one from:</u> <u>For more information, see International System for Human Cytogenomic Nomenclature (ISCN) 2020 for the details of these abbreviations.</u> <ul style="list-style-type: none">• <u>"amp": amplification</u>• <u>"del": deletion</u>• <u>"t": translocation</u>• <u>"inv": inversion</u>• <u>"dup": duplication</u>• <u>"cx": complex reconstruction</u> <u>* Please consult C-CAT if you want to use other types.</u>
<u>cytobands</u>	<u>required</u>	<u>array</u> <u>(length: 1-N, object)</u>	<u>Cytoband information</u>
<u>chromosome</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^[a-zA-Z0-9_¥-]+ \$</u>	<u>Chromosome number</u>
<u>arm</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>short or long arm. Select from the following two options.</u> <ul style="list-style-type: none">• <u>"p": short arm</u>• <u>"q": long arm</u>

<u>region</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^.+</u>	<u>Cytoband region</u>
<u>armLevelChangeNames</u>	<u>optional</u>	<u>array</u> (length: 0-N, <u>string</u> <u>regex:</u> <u>^.+</u>)	<u>Name of chromosome – chromosome arm change in the report by the testing company.</u> <u>Each string in the array must be unique.</u>
<u>sampleItemId</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>approved</u>	<u>optional</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>grade</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>reported</u>	<u>required</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag.</u>

IX-2. Example of armLevelChanges tag

(Example)

```

"armLevelChanges": [
  {
    "itemId": "arm-1",
    "armLevelChangeType": "amp",
    "cytobands": [
      {
        "chromosome": "7",
        "arm": "q"
      }
    ],
    "sampleItemId": "sequence-1-tumor-dna",
    "reported": true
  },
  {
    "itemId": "arm-2",
    "armLevelChangeType": "del",
    "cytobands": [
      {
        "chromosome": "17",
        "arm": "p"
      }
    ],
    "sampleItemId": "sequence-1-tumor-dna",
    "reported": true
  }
]

```

```

    },
    {
      "itemId": "arm-3",
      "armLevelChangeType": "t",
      "cytobands": [
        {
          "chromosome": "X",
          "arm": "q",
          "region": "28"
        },
        {
          "chromosome": "14",
          "arm": "q",
          "region": "11.2"
        }
      ],
      "armLevelChangeNames": [
["t(X;14)(q28;q11.2)"]
        "t(X;14)(q28;q11.2)"
], "t(X;14)(q28;q11.2)"]
      ],
1,
      "sampleItemId": "sequence-1-tumor-dna",
      "reported": true
    },
    {
      "itemId": "arm-4",
      "armLevelChangeType": "amp",
      "cytobands": [
        {
          "chromosome": "21"
        }
      ],
      "armLevelChangeNames": [
        "iAMP21"
      ],
      "sampleItemId": "sequence-1-tumor-dna",
      "reported": true
    }
  ]
}

```

X. nonHumanContents tag

This tag is used to provide the information on non-human content.

<u>Key</u>	<u>Condition</u>	<u>Data type</u>	<u>Description</u>
<u>nonHumanContents</u>	<u>optional</u>	<u>array (length: 1-N, object)</u>	<u>Aggregation tag for information on non-human contents.</u> <u>Each object in the array must be unique.</u>

X-1. Tags within nonHumanContents tag

<u>Key</u>	<u>Condition</u>	<u>Data type</u>	<u>Description</u>
<u>itemId</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>The ID of the item.</u> <u>It must be a unique string of characters within a single case.</u>
<u>organism</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>The name of the species, as listed in the testing company's report.</u>
<u>contentMetrics</u>	<u>optional</u>	<u>array (length: 0-N, object)</u>	<u>Refer to the description in the otherBiomarkers tag.</u>
<u>value</u>	<u>required</u>	<u>number</u>	<u>Refer to the description in the otherBiomarkers tag.</u>
<u>unit</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>Refer to the description in the otherBiomarkers tag.</u>
<u>metricType</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>Refer to the description in the otherBiomarkers tag.</u>
<u>descriptions</u>	<u>optional</u>	<u>array (length: 0-N, string)</u> <u>regex:</u> <u>^.+ \$)</u>	<u>Description on nonHumanContent.</u> <u>Refer to the contents tag within the comments tag for usable languages and new lines.</u>
<u>sampleItemId</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+ \$</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>approved</u>	<u>optional</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag.</u>

<u>grade</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>reported</u>	<u>required</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag.</u>

X-2. Example of nonHumanContents tag

(Example)

```
"nonHumanContents": [
{
  "itemId": "nonHuman-1",
  "organism": "HBV",
  "contentMetrics": [
    {
      "value": 65,
      "unit": "reads-per-million",
      "metricType": "virus-derived read sequences"
    }
  ],
  "descriptions": [
    "Hepatitis B virus."
  ],
  "sampleItemId": "sequence-1-tumor-dna",
  "reported": false
}
]
```

[VH.XI.](#) compositeBiomarkers tag

This tag provides information on composite markers (e.g., combination of gene alterations; fusion composed of three genes) that are represented by the combinations of elements in the shortVariants, copyNumberAlterations, and rearrangements tags.

Key	Condition	Data type	Description
compositeBiomarkers	optional	array (length: 0-N, object)	Aggregation tag for information on composite markers. Each object in the array must be unique.

[VH-1.XI-1.](#) Tags within compositeBiomarkers tag

Key	Condition	Data type	Description
itemId	required	string regex: ^.+ \$	An ID assigned to a composite marker. It must be a unique string of characters within a single case.
componentItemIds	required	array (length: 2-N, string regex: ^.+ \$)	Array of component gene alterations (itemIds). Each string in the array must be unique.
biomarkerNames	required	array (length: 1-N, string regex: ^.+ \$)	The name of the composite marker, as listed in the testing company's report. Each string in the array must be unique.
descriptions	optional	array (length: 0-N, string regex: ^.+ \$)	Description on composite markers Refer to the contents tag within the comments tag for usable languages and new lines.
approved	optional	boolean	Refer to the description in the shortVariants tag.
grade	optional	string [choice]	Refer to the description in the shortVariants tag.
reported	required	boolean	Refer to the description in the shortVariants tag.

~~VH-2~~XI-2. Example of compositeBiomarkers tag

(Example)

```
"compositeBiomarkers": [  
  {  
    "itemId": "composite-1",  
    "componentItemIds": [  
      "variant-14",  
      "variant-15"  
    ],  
    "biomarkerNames": [  
      "BRAF-NRG1-ALK fusion"  
    ],  
    "descriptions": [  
      "Three genes are fused together to produce the fusion gene BRAF-NRG1-ALK."  
    ],  
    "reported": true  
  }  
]
```

VIII-sequencingSamples tag

This tag is used to provide the information on sequencing samples results in the NGS run.

Key	Condition	Data type	Description
sequencingSamples	required	array (length: 1-N, object)	Aggregation tag for information on sequencing samples results. Each object in the array must be unique.

The maximum length of this array is 4, since the tumorOrNormal tag and the nucleicAcid tag can each take two values "tumor" or "normal" and "dnaDNA" or "rnaRNA", respectively.

VIII-1.-Tags within sequencingSamples tag

Key	Condition	Data type	Description
itemId	required	string regex: <u>^.+</u> \$	The ID of the <u>itemsample</u> . It must be a unique string of characters within a single case.
tumorOrNormal	required	string [choice]	Whether the sequencing samples results are of tumor specimen or normal specimen. → "tumor" → "normal"
nucleicAcid	required	string [choice]	Whether the sequencing samples results are derived from DNA or RNA samples. → "DNA": DNA sample → "RNA": RNA sample
<u>resultQuality</u>	<u>optional</u>	<u>string</u> [choice]	<u>The quality of the sequencing samples results determined by the testing company.</u> → <u>"pass": Pass</u> → <u>"reference": Reference purpose only</u> → <u>"fail": Fail</u>
totalReadCount	optional	integer	The total number of reads including unmapped reads
totalMappedReadCount	optional	integer	The total number of mapped reads
<u>specimenType</u>	<u>optional</u>	<u>string</u> regex: <u>^.+</u> \$	<u>The name of the specimen type, as listed written in the testing company's report.</u>

<u>sampleMetrics</u>	<u>optional</u>	<u>array</u> (length: 1- N, object)	<u>Measured value information:</u> <u>Each object in the array must be unique:</u>
<u>value</u>	<u>required</u>	<u>number</u>	<u>Measured value</u> <u>e.g.) 91.52</u>
<u>unit</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+</u> \$	<u>Unit for the measured value:</u> <u>Units may vary depending on test types:</u> <u>e.g.) %</u> <u>If the inspection value is a scalar, you can input</u> <u>null:</u>
<u>type</u>	<u>required</u>	<u>string</u> <u>[choice]</u>	<u>Type of measured value: Select one from:</u> <u>→ "totalReadCount": The total number of reads</u> <u>including unmapped reads:</u> <u>→ "totalMappedReadCount": The total number of</u> <u>mapped reads:</u> <u>→ "duplicateReadsPercentage": Percentage of</u> <u>duplicate reads in total reads:</u> <u>→ "mappedReadsPercentage": Percentage of</u> <u>mapped reads in total reads</u> <u>→ "meanReadDepth": Mean read depth:</u> <u>→ "medianReadDepth": Median read depth:</u> <u>* Inform C-CAT for other options:</u>
<u>duplicateReadsPe</u> <u>rcentage</u>	<u>optional</u>	<u>number</u>	Percentage of duplicate reads in total reads
<u>mappedReadsPer</u> <u>centage</u>	<u>optional</u>	<u>number</u>	Percentage of mapped reads in total reads
<u>meanReadDepth</u>	<u>optional</u>	<u>number</u>	Mean read depth
<u>medianReadDept</u> <u>h</u>	<u>optional</u>	<u>number</u>	Median read depth
<u>suspectedSample</u> <u>States</u>	<u>optional</u>	<u>array</u> (length: 0- N, string) [choice]	<u>The suspicious state of a DNA or RNA sample,</u> <u>such as "contaminated" (must not be duplicated</u> <u>in an array):</u> <u>→ "contaminated": Possibility of contamination</u> <u>→ "deaminated": Possibility of notable cytosine</u> <u>deamination in FFPE DNA</u> <u>→ "fragmented": Possibility of notable (FFPE</u> <u>DNA) fragmentation:</u>

			→ "degraded": Possibility of notable (RNA) degradation → "low tumor purity": Low tumor purity. → "low depth": Low read depth.
--	--	--	--

VIII-2.-Example of sequencingSamples tag

(Example)

```

"sequencingSamples": [
  {
    "itemId": "sequence-1-tumor-dna",
    "tumorOrNormal": "tumor",
    "nucleicAcid": "DNA",
    "specimenType": "FFPE",
    "sampleMetrics": [
      {
        "value": 91.52,
        "unit": "%",
        "type": "duplicateReadsPercentage"
      },
      {
        "value": 87.31,
        "unit": "%",
        "type": "mappedReadsPercentage"
      },
      {
        "value": 247,
        "unit": null,
        "type": "meanReadDepth"
      },
      {
        "value": 238,
        "unit": null,
        "type": "medianReadDepth"
      }
    ]
  },
  {
    "duplicateReadsPercentage": 91.52,
    "mappedReadsPercentage": 87.31,
    "meanReadDepth": 247.8,
    "medianReadDepth": 238
  },
  {
    "itemId": "sequence-2-tumor-rna",
    "tumorOrNormal": "tumor",
    "nucleicAcid": "RNA",
    "sampleMetrics": [
      {
        "value": 11928428,
        "unit": null,

```

```

    "type": "totalReadCount"
  },
  {
    "value": 9542742,
    "unit": null,
    "type": "totalMappedReadCount"
  }
},
"totalReadCount": 11928428,
"totalMappedReadCount": 9542742,
"suspectedSampleStates": [
  "degraded"
]
},
{
  "itemId": "sequence=3=normal=dna",
  "tumorOrNormal": "normal",
  "nucleicAcid": "DNA"
}
]

```

IX-expressions tag

This tag is used to provide the information on gene expression.

Key	Condition	Data type	Description
expressions	optional	array (length: 1-N, object)	Aggregation tag for information on gene expressions. Each object in the array must be unique.

IX-1.-Tags within expressions tag

Key	Condition	Data type	Description
itemId	required	string regex: <u>^.+</u> \$	An ID assigned to an expression. It must be a unique string of characters within a single case.
readCount	optional	number	Number of reads
transcripts	required	array (length: 1-N, object)	Refer to the description in the shortVariants tag.
transcriptId	optional	string regex: <u>^[^\\s]+</u> \$	Refer to the description in the shortVariants tag.
transcriptDatabaseName	optional	string [choice]	Refer to the description in the shortVariants tag. If the transcriptId is entered, this key is recommended to input as well.
transcriptDatabaseVersion	optional	string regex: <u>^.+</u> \$	Refer to the description in the shortVariants tag.
geneSymbol	required	string regex: <u>^[^\\s]+</u> \$	Refer to the description in the shortVariants tag.
<u>regionName</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^.+</u> \$	<u>Refer to the description in the shortVariants tag.</u>
<u>regionType</u>	<u>optional</u>	<u>string</u> [choice]	<u>Refer to the description in the shortVariants tag.</u>

strand	optional	string [choice]	Refer to the description in the shortVariants tag.
cdsChange	optional	string regex: ^.+\$\$	Refer to the description in the shortVariants tag.
aminoAcidsChange	optional	string regex: ^.+\$\$	Refer to the description in the shortVariants tag.
calculatedEffects	optional	array (length: 0-N, string regex: ^.+\$\$)	Refer to the description in the shortVariants tag.
expressionLevelMetrics	required	array (length: 1-N, object)	Refer to the description in the rearrangements tag.
value	required	number	Refer to the description in the rearrangements tag.
unit	required	string [choice]	Refer to the description in the rearrangements tag.
statisticType	optional	string [choice]	Refer to the description in the rearrangements tag.
sampleSize	optional	integer	Refer to the description in the rearrangements tag.
isControl	optional	boolean	Refer to the description in the rearrangements tag.
sampleItemId	required	string regex: ^.+\$\$	Refer to the description in the shortVariants tag.
<u>approved</u>	<u>optional</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag.</u>
<u>grade</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag.</u>
reported	required	boolean	Refer to the description in the shortVariants tag.



IX-2.-Example of expressions tag

(Example)

```
"expressions": [
  {
    "itemId": "expression-1",
    "readCount": 9928,
    "transcripts": [
      {
        "transcriptDatabaseName": "RefSeq",
        "transcriptDatabaseVersion": "Release 99",
        "geneSymbol": "MET"
      }
    ],
    "expressionLevelMetrics": [
      {
        "value": 28.24,
        "unit": "TPM",
        "isControl": false
      },
      {
        "value": 142.7,
        "unit": "TPM",
        "statisticType": "mean",
        "sampleSize": 20,
        "isControl": true
      },
      {
        "value": 134.2,
        "unit": "TPM",
        "statisticType": "standard deviation",
        "sampleSize": 20,
        "isControl": true
      }
    ],
    "sampleItemId": "sequence-4-normal-rna",
    "reported": true
  }
]
```

armLevelChanges tag

This tag is used to provide the information about non-chromosome — chromosome arm — change.

<u>Key</u>	<u>Condition</u>	<u>Data type</u>	<u>Description</u>
<u>armLevelChanges</u>	<u>optional</u>	<u>array (length: 1-N; object)</u>	<u>Aggregation tag for armLevelChange information.</u> <u>Each object in the array must be unique.</u>

Tags within armLevelChanges tag

<u>Key</u>	<u>Condition</u>	<u>Data type</u>	<u>Description</u>
<u>itemId</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.++\$</u>	<u>An ID assigned to chromosome — chromosome arm — change.</u> <u>It must be a unique string of characters within a single case.</u>
<u>armLevelChangeType</u>	<u>required</u>	<u>string</u> <u>[choice]</u>	<u>Type of the change for chromosome or chromosome arm level change.</u> <u>Select one from:</u> <u>For more information, see International System for Human Cytogenomic Nomenclature (ISCN) 2020 for the details of these abbreviations..</u> <u>→ "amp": amplification</u> <u>→ "del": deletion</u> <u>→ "t": translocation</u> <u>→ "inv": inversion</u> <u>→ "dup": duplication</u> <u>→ "cx": complex reconstruction</u> <u>* Please consult C-CAT if you want to use other types.* Inform C-CAT for other options.</u>
<u>cytobands</u>	<u>required</u>	<u>array</u> <u>(length: 1-N;</u> <u>object)</u>	<u>Cytoband information</u>
<u>chromosome</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^[a-zA-Z0-9-YY-]+\$</u>	<u>Chromosome number</u>

<u>arm</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>short or long arm. Select from the following two options:</u> <u>→ "p": short arm</u> <u>→ "q": long arm</u>
<u>region</u>	<u>optional</u>	<u>string</u> <u>regex:</u> <u>^.+</u>	<u>Cytoband region</u>
<u>armLevelChangeNames</u>	<u>optional</u>	<u>array</u> <u>(length: 0-N;</u> <u>string</u> <u>regex:</u> <u>^.+</u>	<u>Name of chromosome – chromosome arm change in the report by the testing company:</u> <u>Each string in the array must be unique:</u>
<u>sampleItemId</u>	<u>required</u>	<u>string</u> <u>regex:</u> <u>^.+</u>	<u>Refer to the description in the shortVariants tag:</u>
<u>approved</u>	<u>optional</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag:</u>
<u>grade</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants tag:</u>
<u>reported</u>	<u>required</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag:</u>

—— Example of armLevelChanges tag

```
(Example)
"armLevelChanges": [
  {
    "itemId": "arm-1",
    "armLevelChangeType": "amp",
    "cytobands": [
      {
        "chromosome": "7",
        "arm": "q"
      }
    ],
    "sampleItemId": "sequence-1=tumor-dna",
    "reported": true
  },
  {
    "itemId": "arm-2",
    "armLevelChangeType": "del",
    "cytobands": [
```

```

    {
      "chromosome": "17",
      "arm": "p"
    }
  ],
  "sampleItemId": "sequence-1-tumor-dna",
  "reported": true
},
{
  "itemId": "arm-3",
  "armLevelChangeType": "t",
  "cytobands": [
    {
      "chromosome": "X",
      "arm": "q",
      "region": "28"
    },
    {
      "chromosome": "14",
      "arm": "q",
      "region": "11.2"
    }
  ],
  "armLevelChangeNames": [
    "t(X;14)(q28;q11.2)"
  ],
  "sampleItemId": "sequence-1-tumor-dna",
  "reported": true
},
{
  "itemId": "arm-4",
  "armLevelChangeType": "amp",
  "cytobands": [
    {
      "chromosome": "21"
    }
  ],
  "armLevelChangeNames": [
    "iAMP21"
  ],
  "sampleItemId": "sequence-1-tumor-dna",
  "reported": true
}
]

```

~~X.-nonHumanContents tag~~

~~This tag is used to provide the information on non-human content.~~

Key	Condition	Data type	Description
nonHumanContents	optional	array (length: 1-N, object)	Aggregation tag for information on non-human contents. Each object in the array must be unique.

~~X-1.-Tags within nonHumanContents tag~~

Key	Condition	Data type	Description
itemId	required	string regex: $\Delta.+ \$$	The ID of the item. It must be a unique string of characters within a single case.
organism	required	string regex: $\Delta.+ \$$	The name of the species, as listed in the testing company's report.
contentMetrics	optional	array (length: 0-N, object)	Refer to the description in the otherBiomarkers tag.
value	required	number	Refer to the description in the otherBiomarkers tag.
unit	required	string regex: $\Delta.+ \$$	Refer to the description in the otherBiomarkers tag.
metricType	required	string regex: $\Delta.+ \$$	Refer to the description in the otherBiomarkers tag.
descriptions	optional	array (length: 0-N, string regex: $\Delta.+ \$$)	Description on nonHumanContent. Refer to the contents tag within the comments tag for usable languages and new lines.
sampleItemId	required	string regex: $\Delta.+ \$$	Refer to the description in the shortVariants tag.
<u>approved</u>	<u>optional</u>	<u>boolean</u>	<u>Refer to the description in the shortVariants tag.</u>

<u>grade</u>	<u>optional</u>	<u>string</u> <u>[choice]</u>	<u>Refer to the description in the shortVariants-</u> <u>tag.</u>
reported	required	boolean	Refer to the description in the shortVariants- tag.

X-2.-Example of nonHumanContents tag

```
(Example)"nonHumanContents": [
  {
    "itemId": "nonHuman=1",
    "organism": "HBV",
    "contentMetrics": [
      {
        "value": 65,
        "unit": "reads-per-million",
        "metricType": "virus-derived read sequences"
      }
    ],
    "descriptions": [
      "Hepatitis B virus."
    ],
    "sampleItemId": "sequence-1-tumor-dna",
    "reported": false
  }
]
```


~~XI~~XII. Other notes

Precautions.

~~XI-1~~XII-1. itemId

The value of itemId must be unique within the file. The value can be any string.

~~XI-1-1~~XII-1-1. -Example of itemId description

Examples of itemId values for each tag are as follows.

- For variants tag

```
"itemId": "variant-1"
```

```
"itemId": "variant-2"
```

```
"itemId": "variant-3"
```

- For otherBiomarkers tag

```
"itemId": "biomarker-1"
```

```
"itemId": "biomarker-2"
```

```
"itemId": "biomarker-3"
```

- For sequencingSamples tag

```
"itemId": "sequence-1-tumor-dna"
```

```
"itemId": "sequence-2-tumor-rna"
```

```
"itemId": "sequence-3-normal-dna"
```

- For compositeBiomarkers tag

```
"itemId": "composite-1"
```

```
"itemId": "composite-2"
```

```
"itemId": "composite-3"
```

~~XI-2-1~~.XII-2. matePieceLocation

Here, we provide an explanation for matePieceLocation in the breakends tag. We assume that "upstream" and "downstream" correspond to the direction of decreasing and increasing positional coordinates along a chromosome in a reference genome sequence, respectively.

Note: These "upstream" and "downstream" are different from those in the transcriptional direction.


~~XI-2-1~~.XII-2-1. -Example of matePieceLocation description

We illustrate how to input matePieceLocation and present representations in VCF format (v4.3). The examples below are modified from the figure in the following documents:

The Variant Call Format Specification VCF v4.3 and BCF v2.2

<https://samtools.github.io/hts-specs/VCFv4.3.pdf>

Example of rearrangements:

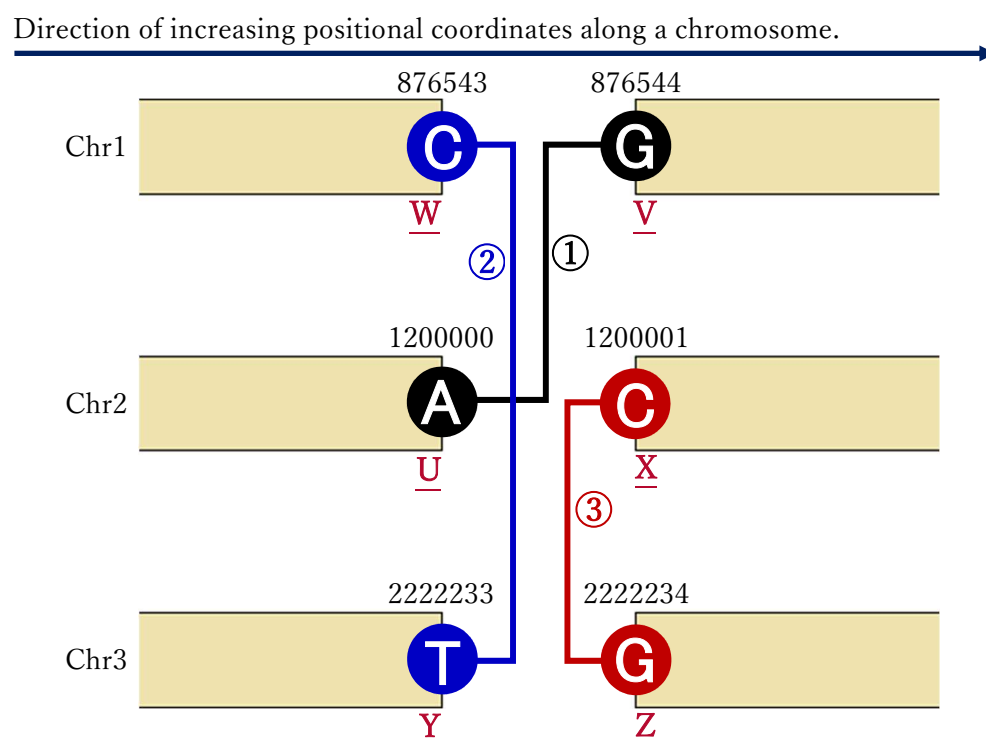

Description in VCF format:

The representations in VCF v4.3 for the figure above are as follows: The numbers in the leftmost column in the table below correspond to the numbers in the figure above.

#CHROM	POS	ID	REF	ALT	QUAL	FILTER	INFO
--------	-----	----	-----	-----	------	--------	------

①	1	876544	bnd_V	G]2:1200000]G	6	PASS	SVTYPE=BND
	2	1200000	bnd_U	A	A[1:876544[6	PASS	SVTYPE=BND
②	1	876543	bnd_W	C	C]3:2222233]	6	PASS	SVTYPE=BND
	3	2222233	bnd_Y	T	T]1:876543]	6	PASS	SVTYPE=BND
③	2	1200001	bnd_X	C	[3:2222234[C	6	PASS	SVTYPE=BND
	3	2222234	bnd_Z	G	[2:1200001[G	6	PASS	SVTYPE=BND

Descriptions in the standardized format:

• Example①

For the chromosome 2 junction point, the downstream sequence of the junction point is replaced with another sequence; therefore, the value of matePieceLocation is "downstream". In contrast, for the chromosome 1 junction point, the upstream sequence of the junction point is replaced with another sequence; therefore, the value of matePieceLocation is "upstream".

(Example①)

```
"breakends": [
  {
    "chromosome": "2",
    "startPosition": 1200000,
    "endPosition": 1200000,
    "matePieceLocation": "downstream"
  },
  {
    "chromosome": "1",
    "startPosition": 876654,
    "endPosition": 876654,
    "matePieceLocation": "upstream"
  }
]
```

• Example②

For the chromosome 1 junction point, the downstream sequence of the junction point is replaced with another sequence; therefore, the value of matePieceLocation is "downstream". The same is true for chromosome 3; thus, the value of matePieceLocation is "downstream".

(Example②)

```
"breakends": [
  {
    "chromosome": "1",
    "startPosition": 876543,
    "endPosition": 876543,
    "matePieceLocation": "downstream"
  },
  {
    "chromosome": "3",
    "startPosition": 2222233,
    "endPosition": 2222233,
    "matePieceLocation": "downstream"
  }
]
```

```
{
  "chromosome": "3",
  "startPosition": 2222233,
  "endPosition": 2222233,
  "matePieceLocation": "downstream"
}
```

• Example③

For the chromosome 2 junction point, the upstream sequence of the junction point is replaced with another sequence; therefore, the value of matePieceLocation is "upstream". The same is true for the chromosome 3 junction point; thus, the value of matePieceLocation is "upstream".

(Example③)

```
"breakends": [
  {
    "chromosome": "2",
    "startPosition": 1200001,
    "endPosition": 1200001,
    "matePieceLocation": "upstream"
  },
  {
    "chromosome": "3",
    "startPosition": 2222234,
    "endPosition": 2222234,
    "matePieceLocation": "upstream"
  }
]
```

[XH.XIII.](#) For inquires

Please contact the C-CAT Help Desk.

E-Mail: helpdesk_c-cat@ml.res.ncc.go.jp